

INDOOR COLLECTION

2027

labos



KHAN SHATYR, ASTANA

LABOS LIGHTING

WE DESIGN, MAKE AND INSTALL ARCHITECTURAL LIGHTING.

Every project starts from the architect's drawings: we choose, detail and place each luminaire, space by space. This collection brings together our indoor families, from compact downlights to magnetic track systems.

ASTANA	Astana Grand Mosque
ASTANA	Khan Shatyr
ISTANBUL	Atatürk Cultural Centre

CONTENTS

01 Downlights and spots 004

Cylite	005
Vectra	006
Forion	007
Mizora	008
Minora	009
Trimora	010
Bosphor	014
Lumin	015
Tita	016
Artemon	017
Evoris	018
Zerona	019
Torrea	020
Indeo	021
Indeo Trimless	022
Shadowlux	023
Lintrava	024
Mannore Square	025
Mannore Surface	026
Vector	027
Mofx	028
Orbix	029
Photran R	030
Photran S	031
Photran T	032
Caltriva F	033
Caltriva R	034
Caltriva S	035
Meralux	036
Strix	037
Peranova	038
Auris	046
Deeplux	049
Carmea	050
Inaron	051
Barra	052
Profond	053
Lunet	054
Lumetrix	055
Giznova	059
Luxora	060
Dracon	070
Delterra	073
Lavis	079

02 Track spots 080

Purelux	081
Luma	082
Cylite	083
Axis	084
Glow	085
Voltis	086
Lumis	087
Yasmira	088
Bavero	089
Konex	090
Tenoris	091
Terra	092
Celis	093
Hydros	094
Auris	095
Cosvex	098
Magnor	099
Azure	100
Sferra	101
Pivora	102
Stylon	103
Elan	104
Focara	105
Rondo	106

03 Magnetic and slim track systems 107

Cylite	108
Opton	109
Glow	110
Voltis	111
Nano	112
Orient	113
Flovira	114
Foltrix	115
Foltrix Flat	116
Lastrim	117
Nova	118
MonoVolt	119
Trackon	120

04 Surface, pendant and wall wash 136

Optis	137
Cylite	138
Lumis	139
Orbix Surface	140
Solaris	141
Linvera	142
Lutriva	143
Orbelia L	144
Orbelia S	145
Edge Classic	146
Edge Mini	147
Cirvona	148
Celis	149
Hydros	150
Auris	159
Azure	168
Sferra	173
Barra	174
Pivora	175
Profond	179
Lumetrix	180
Stylon	181
Stylon Slim	182
Gradia	183
Vertis	186
Pictora	187
Perla	188
Rondo	189
Giznova	192
Colona	193
Quadris	194
Lumina	195
Modulon	196
Conica	203
Stelo	204
Vela	205

CCT
Colour temperature, kelvin

CRI
Colour rendering index, Ra

UGR
Unified glare rating

IP
Ingress protection

CODE
Full order code, listed in the index



01

DOWNLIGHTS AND SPOTS

Cylite	005	Artemon	017	Mannore Surface	026	Caltriva S	035	Profond	053
Vectra	006	Evoris	018	Vector	027	Meralux	036	Lunet	054
Forion	007	Zerona	019	Mofx	028	Strix	037	Lumetrix	055
Mizora	008	Torrea	020	Orbix	029	Peranova	038	Giznova	059
Minora	009	Indeo	021	Photran R	030	Auris	046	Luxora	060
Trimora	010	Indeo Trimless	022	Photran S	031	Deeplux	049	Dracon	070
Bosphor	014	Shadowlux	023	Photran T	032	Carmea	050	Delterra	073
Lumin	015	Lintrava	024	Caltriva F	033	Inaron	051	Lavis	079
Tita	016	Mannore Square	025	Caltriva R	034	Barra	052		

44 FAMILIES

Above: Rixos Premium Saadiyat Island, Abu Dhabi

CYLITE

Recessed spotlight

Flexible accent lighting for fashion retail and display spaces where precise aiming and visual focus matter.

VERSIONS	POWER	FLUX
4	11–36 W	935–4509 lm





UGR	--
CCT	2700 / 3000 / 3500 / 4000 K
CRI	90
IP	IP20
DIMMING	TRIAC / DALI / 0-10V
ADJUSTMENT	Tilt 90°, rotation 350°
ACCESSORIES	Protective glass, linear spread lens, textured glass, honeycomb louver, CCT selector switch









CODE	56.04011	56.05518	56.06511	56.08011
DRAWING				
POWER	11 W	14 W	24 W	36 W
FLUX (3000 K)	935 lm	1627 lm	2963 lm	4509 lm
CURRENT	250 mA	350 mA	600 mA	900 mA
BEAM ANGLE	19° / 29° / 44° / 56°	18° / 27° / 38° / 54°	14° / 28° / 40° / 50°	16° / 20° / 30° / 45°
DIMENSIONS	45 × 100 mm	62 × 130 mm	73 × 148 mm	90 × 160 mm
CUT-OUT	40 mm	55 mm	65 mm	80 mm

Product page and enquiries
labos.com.tr/products/downlight/cylite-downlight/

VECTRA

Recessed downlight

High-output lighting solutions for large-scale and high-ceiling environments.

VERSIONS	POWER	FLUX
3	40–80 W	4769–9122 lm




CCT	2700 / 3000 / 3500 / 4000 K
CRI	90
IP	IP20
DIMMING	TRIAC / DALI / 0-10V
ACCESSORIES	Protective glass, linear spread lens, textured glass, honeycomb louver, CCT selector switch









CODE	51.11011	51.13511	51.16011
DRAWING			
POWER	40 W	60 W	80 W
FLUX (3000 K)	4769 lm	7546 lm	9122 lm
CURRENT	1050 mA	1500 mA	2100 mA
BEAM ANGLE	22° / 42° / 60°	21° / 38° / 56° / 66°	26° / 36° / 46° / 70°
DIMENSIONS	123 × 110 mm	150 × 124 mm	176 × 168 mm
CUT-OUT	110 mm	135 mm	160 mm
UGR	<17	<19	<22

Product page and enquiries
labos.com.tr/products/downlight/vectra/

FORION

Recessed downlight

Small in scale. Exceptional in comfort.

Discreet lighting for refined interiors where visual comfort and clean ceiling integration matter.

VERSIONS	POWER	FLUX
4	7–14 W	605–1298 lm

CCT	2700 / 3000 / 3500 / 4000 K
CRI	90
IP	IP20
DIMMING	TRIAC / DALI / 0-10V
ADJUSTMENT	Tilt 30°
ACCESSORIES	Protective glass, linear spread lens, textured glass, honeycomb louver, CCT selector switch















CODE	52.04539	52.04538	52.05559	52.05557
DRAWING				
POWER	7 W	10 W	10 W	14 W
FLUX (3000 K)	605 lm	944 lm	973 lm	1298 lm
CURRENT	180 mA	250 mA	250 mA	350 mA
BEAM ANGLE	20° / 24° / 35° / 46°	24° / 29° / 39° / 53°	30° / 39° / 54°	23° / 26° / 33° / 49°
DIMENSIONS	50 × 92 mm	50 × 112 mm	61 × 102 mm	61 × 122 mm
CUT-OUT	45 mm	45 mm	55 mm	55 mm
UGR	–	<12	<9	<12

Product page and enquiries
labos.com.tr/products/downlight/forion/

MIZORA

Recessed downlight

Discreet lighting solutions for refined residential interiors.

VERSIONS	POWER	FLUX
4	6–8 W	353–471 lm





CCT	2700 / 3000 / 3500 / 4000 K
CRI	90
IP	IP20
DIMMING	TRIAC / DALI / 0-10V
ACCESSORIES	Protective glass, linear spread lens, textured glass, honeycomb louver









CODE	51.03015	51.04511	52.04512	51.04011
DRAWING				
POWER	6 W	6 W	6 W	8 W
FLUX (3000 K)	353 lm	368 lm	368 lm	471 lm
CURRENT	150 mA	150 mA	150 mA	180 mA
BEAM ANGLE	21° / 27° / 39° / 57°	19° / 22° / 31° / 46°	19° / 22° / 31° / 46°	18° / 22° / 34° / 46°
DIMENSIONS	35 × 80 mm	50 × 81 mm	50 × 81 mm	45 × 81 mm
CUT-OUT	30 mm	45 mm	45 mm	40 mm
UGR	<18	<18	<18	<16
ADJUSTMENT	–	–	Tilt 30°, rotation 350°	–

Product page and enquiries
labos.com.tr/products/downlight/mizora/

MINORA

Recessed downlight

Service-friendly lighting for refined interiors requiring long-term flexibility.



VERSIONS

2

POWER	8 W
FLUX (3000 K)	608 lm
CURRENT	180 mA
BEAM ANGLE	18° / 23° / 32° / 45°
DIMENSIONS	43 × 77 mm
CUT-OUT	38 mm
UGR	<18
CCT	2700 / 3000 / 3500 / 4000 K
CRI	90
IP	IP20
DIMMING	TRIAC / DALI / 0-10V
ACCESSORIES	Protective glass, linear spread lens, textured glass, honeycomb louver, CCT selector switch





CODE	51.03823	51.03825
DRAWING		

Product page and enquiries
labos.com.tr/products/downlight/minora/

TRIMORA

Recessed downlight

One family. Three mounting options.

Comfortable general lighting for everyday commercial and hospitality interiors.

VERSIONS	POWER	FLUX
48	12–41 W	600–4300 lm

UGR	<19
CCT	2700 / 3000 / 3500 / 4000 K
CRI	90
IP	IP20
DIMMING	TRIAC
ACCESSORIES	Protective glass, linear spread lens, textured glass, honeycomb louver, CCT selector switch



12 CONFIGURATIONS



51.05017-51.09013

4 VERSIONS, P. 011



51.05018-51.09015

4 VERSIONS, P. 011



52.05018-52.09012

4 VERSIONS, P. 011



52.05019-52.09013

4 VERSIONS, P. 011



57.05013-57.09013

4 VERSIONS, P. 012



57.05015-57.09015

4 VERSIONS, P. 012



57.05017-57.09017

4 VERSIONS, P. 012



57.05018-57.09018

4 VERSIONS, P. 012



60.05012-60.09013

4 VERSIONS, P. 013



60.05013-60.09015

4 VERSIONS, P. 013



60.05015-60.09016

4 VERSIONS, P. 013







60.05016-60.09017

4 VERSIONS, P. 013

Product page and enquiries
labos.com.tr/products/downlight/trimora/





TRIMORA Recessed downlight

VERSIONS 1-16 OF 48

		CODE	POWER	FLUX (3000 K)	CURRENT	BEAM ANGLE	DIMENSIONS	CUT-OUT	ADJUSTMENT
	51.05017 H=119mm/51.05019 H=99mm 	**51.05017**	12 W	758 lm	300 mA	18° / 23° / 30° / 46°	56 × 119 mm	50 mm	–
		51.06011	14 W	1107 lm	350 mA	21° / 25° / 36° / 45°	66 × 125 mm	60 mm	–
		51.07012	24 W	2322 lm	600 mA	20° / 32° / 40° / 48°	76 × 129 mm	70 mm	–
		51.09013	40 W	4300 lm	1050 mA	25° / 32° / 43° / 52°	99 × 140 mm	90 mm	–
	51.05018 H=127mm/51.05020 H=107mm 	**51.05018**	12 W	736 lm	300 mA	18° / 22° / 30° / 42°	56 × 127 mm	50 mm	–
		51.06012	14 W	1115 lm	350 mA	22° / 26° / 39° / 48°	66 × 134 mm	60 mm	–
		51.07013	24 W	2310 lm	600 mA	21° / 32° / 40° / 48°	76 × 139 mm	70 mm	–
		51.09015	40 W	4278 lm	1050 mA	25° / 32° / 43° / 49°	99 × 149 mm	90 mm	–
	52.05018 H=119mm/52.05021 H=99mm 	**52.05018**	12 W	600 lm	300 mA	20° / 23° / 30° / 42°	56 × 119 mm	50 mm	Tilt 20°, rotation 350°
		52.06020	14 W	1055 lm	350 mA	25° / 28° / 41° / 47°	66 × 125 mm	60 mm	Tilt 20°, rotation 350°
		52.07013	24 W	2299 lm	600 mA	21° / 32° / 40° / 52°	76 × 129 mm	70 mm	Tilt 20°, rotation 350°
		52.09012	41 W	4048 lm	1050 mA	25° / 35° / 40° / 51°	99 × 140 mm	90 mm	Tilt 20°, rotation 350°
	52.05019 H=119mm/52.05022 H=99mm 	**52.05019**	12 W	758 lm	300 mA	8° / 18° / 23° / 30° / 46°	56 × 119 mm	50 mm	Tilt 30°, rotation 350°
		52.06021	14 W	1107 lm	350 mA	9° / 21° / 25° / 36° / 45°	66 × 125 mm	60 mm	Tilt 30°, rotation 350°
		52.07015	24 W	2322 lm	600 mA	9° / 20° / 32° / 40° / 48°	76 × 129 mm	70 mm	Tilt 30°, rotation 350°
		52.09013	40 W	4300 lm	1050 mA	8° / 25° / 32° / 43° / 52°	99 × 140 mm	90 mm	Tilt 30°, rotation 350°



TRIMORA Recessed downlight

VERSIONS 17-32 OF 48

		CODE	POWER	FLUX (3000 K)	CURRENT	BEAM ANGLE	DIMENSIONS	CUT-OUT	ADJUSTMENT
	57.05013 H=119mm/57.05020 H=99mm 	**57.05013**	12 W	600 lm	300 mA	20° / 23° / 30° / 42°	49 × 119 mm	50 mm	Tilt 20°, rotation 350°
		57.06017	14 W	1055 lm	350 mA	25° / 28° / 41° / 47°	59 × 125 mm	60 mm	Tilt 20°, rotation 350°
		57.07016	24 W	2299 lm	600 mA	21° / 32° / 40° / 52°	69 × 129 mm	70 mm	Tilt 20°, rotation 350°
		57.09013	41 W	4048 lm	1050 mA	25° / 35° / 40° / 51°	89 × 140 mm	90 mm	Tilt 20°, rotation 350°
	57.05015 H=119mm/57.05021 H=99mm 	**57.05015**	12 W	758 lm	300 mA	8° / 18° / 23° / 30° / 46°	49 × 119 mm	50 mm	Tilt 30°, rotation 350°
		57.06018	14 W	1107 lm	350 mA	9° / 21° / 25° / 36° / 45°	59 × 125 mm	60 mm	Tilt 30°, rotation 350°
		57.07017	24 W	2322 lm	600 mA	9° / 20° / 32° / 40° / 48°	69 × 129 mm	70 mm	Tilt 30°, rotation 350°
		57.09015	40 W	4300 lm	1050 mA	8° / 25° / 32° / 43° / 52°	89 × 140 mm	90 mm	Tilt 30°, rotation 350°
	57.05017 H=119mm/57.05022 H=99mm 	**57.05017**	12 W	600 lm	300 mA	20° / 23° / 30° / 42°	85 × 119 mm	50 mm	Tilt 20°, rotation 350°
		57.06020	14 W	1055 lm	350 mA	25° / 28° / 41° / 47°	95 × 125 mm	60 mm	Tilt 20°, rotation 350°
		57.07019	24 W	2299 lm	600 mA	21° / 32° / 40° / 52°	105 × 129 mm	70 mm	Tilt 20°, rotation 350°
		57.09017	41 W	4048 lm	1050 mA	25° / 35° / 40° / 51°	125 × 140 mm	90 mm	Tilt 20°, rotation 350°
	57.05018 H=119mm/57.05023 H=99mm 	**57.05018**	12 W	758 lm	300 mA	8° / 18° / 23° / 30° / 46°	85 × 119 mm	50 mm	Tilt 30°, rotation 350°
		57.06021	14 W	1107 lm	350 mA	9° / 21° / 25° / 36° / 45°	95 × 125 mm	60 mm	Tilt 30°, rotation 350°
		57.07020	24 W	2322 lm	600 mA	9° / 20° / 32° / 40° / 48°	105 × 129 mm	70 mm	Tilt 30°, rotation 350°
		57.09018	40 W	4300 lm	1050 mA	8° / 25° / 32° / 43° / 52°	125 × 140 mm	90 mm	Tilt 30°, rotation 350°

TRIMORA Recessed downlight

VERSIONS 33-48 OF 48

		CODE	POWER	FLUX (3000 K)	CURRENT	BEAM ANGLE	DIMENSIONS	CUT-OUT	ADJUSTMENT
	60.05012 H=119mm/60.05017 H=99mm 	**60.05012**	12 W	758 lm	300 mA	18° / 23° / 30° / 46°	49 × 119 mm	50 mm	–
		60.06012	14 W	1107 lm	350 mA	21° / 25° / 36° / 45°	59 × 125 mm	60 mm	–
		60.07011	24 W	2322 lm	600 mA	20° / 32° / 40° / 48°	69 × 129 mm	70 mm	–
		60.09013	40 W	4300 lm	1050 mA	25° / 32° / 43° / 52°	89 × 140 mm	90 mm	–
	60.05013 H=127mm/60.05018 H=107mm 	**60.05013**	12 W	736 lm	300 mA	18° / 22° / 30° / 42°	49 × 127 mm	50 mm	–
		60.06013	14 W	1115 lm	350 mA	22° / 26° / 39° / 48°	59 × 134 mm	60 mm	–
		60.07012	24 W	2310 lm	600 mA	21° / 32° / 40° / 48°	69 × 139 mm	70 mm	–
		60.09015	40 W	4278 lm	1050 mA	25° / 32° / 43° / 51°	89 × 149 mm	90 mm	–
	60.05015 H=119mm/60.05019 H=99mm 	**60.05015**	12 W	758 lm	300 mA	18° / 23° / 30° / 46°	85 × 119 mm	50 mm	–
		60.06015	14 W	1107 lm	350 mA	21° / 25° / 36° / 45°	95 × 125 mm	60 mm	–
		60.07013	24 W	2322 lm	600 mA	20° / 32° / 40° / 48°	105 × 129 mm	70 mm	–
		60.09016	40 W	4300 lm	1050 mA	25° / 32° / 43° / 52°	125 × 140 mm	90 mm	–
	60.05016 H=127mm/60.05020 H=107mm 	**60.05016**	12 W	736 lm	300 mA	18° / 22° / 30° / 42°	85 × 127 mm	50 mm	–
		60.06016	14 W	1115 lm	350 mA	22° / 26° / 39° / 48°	95 × 134 mm	60 mm	–
		60.07015	24 W	2310 lm	600 mA	21° / 32° / 40° / 48°	105 × 139 mm	70 mm	–
		60.09017	40 W	4278 lm	1050 mA	25° / 32° / 43° / 49°	125 × 149 mm	90 mm	–

BOSPHOR

Recessed downlight

One light module. Two mounting options.

Modular architectural lighting for commercial, residential and retail environments.

VERSIONS
6


POWER
10–27 W

FLUX
938–2951 lm

UGR	<19
CCT	2700 / 3000 / 3500 / 4000 K
CRI	90
IP	IP20
DIMMING	TRIAC / DALI / 0-10V
ADJUSTMENT	Tilt 30°, rotation 350°
ACCESSORIES	Protective glass, linear spread lens, textured glass, honeycomb louver, CCT selector switch





CODE	52.05552	52.07542	52.09538	57.05525	57.07510	57.09518
DRAWING	 52.09538					
POWER	10 W	15 W	27 W	10 W	15 W	27 W
FLUX (3000 K)	938 lm	1555 lm	2951 lm	938 lm	1555 lm	2951 lm
CURRENT	250 mA	350 mA	700 mA	250 mA	350 mA	700 mA
BEAM ANGLE	8° / 22° / 31° / 44° / 55°	8° / 20° / 26° / 39° / 53°	7° / 22° / 32° / 43° / 53°	8° / 22° / 31° / 44° / 55°	8° / 20° / 26° / 39° / 53°	7° / 22° / 32° / 43° / 53°
DIMENSIONS	61 × 107 mm	81 × 118 mm	105 × 155 mm	52 × 107 mm	73 × 118 mm	91 × 155 mm
CUT-OUT	55 mm	75 mm	95 mm	55 mm	75 mm	95 mm

Product page and enquiries
labos.com.tr/products/downlight/bosphor/

LUMIN

Recessed downlight





Precision adjustable lighting for retail, hospitality and gallery interiors.

VERSIONS	POWER	FLUX
4	10–14 W	880–1108 lm

UGR	<19
CCT	2700 / 3000 / 3500 / 4000 K
CRI	90
IP	IP20
DIMMING	TRIAC / DALI / 0-10V
ADJUSTMENT	Tilt 40°, rotation 350°
ACCESSORIES	Protective glass, linear spread lens, textured glass, honeycomb louver, CCT selector switch





CODE	52.05549	52.07540	57.05526	57.07511
DRAWING				
POWER	10 W	14 W	10 W	14 W
FLUX (3000 K)	880 lm	1108 lm	880 lm	1108 lm
CURRENT	250 mA	350 mA	250 mA	350 mA
BEAM ANGLE	9° / 23° / 31° / 42° / 54°	8° / 18° / 25° / 33° / 50°	9° / 23° / 31° / 42° / 54°	8° / 18° / 25° / 33° / 50°
DIMENSIONS	60 × 87 mm	80 × 98 mm	54 × 87 mm	74 × 98 mm
CUT-OUT	55 mm	75 mm	55 mm	75 mm

Product page and enquiries
labos.com.tr/products/downlight/lumin/

TITA

Recessed cabinet wall washer



Asymmetric cabinet lighting for uniform illumination of vertical display surfaces.

VERSIONS	POWER	FLUX
2	4–9 W	150–425 lm

CCT	2700 / 3000 / 3500 / 4000 K
CRI	90
IP	IP20
DIMMING	TRIAC / DALI / 0-10V





CODE	51.03027	51.05013
DRAWING		
POWER	4 W	9 W
FLUX (3000 K)	150 lm	425 lm
CURRENT	250 mA	200 mA
BEAM ANGLE	Wall wash, tilted 10°, beam 45°	Wall wash, tilted 10°, beam 48°
DIMENSIONS	36 × 35 mm	55 × 64 mm
CUT-OUT	30 mm	50 mm
UGR	<17	<26

Product page and enquiries
labos.com.tr/products/downlight/tita/

ARTEMON

Wall-wash downlight

Adjustable wall-wash lighting for architectural walls, artworks and display surfaces requiring smooth, continuous vertical illumination.




VERSIONS	POWER	FLUX
3	12–30 W	511–1707 lm

UGR	<19
CCT	2700 / 3000 / 3500 / 4000 K
CRI	90
IP	IP20
DIMMING	TRIAC / DALI / 0-10V
ADJUSTMENT	Tilt 25°, rotation 350°







CODE	52.06520	52.08529	52.10513
DRAWING			
POWER	12 W	20 W	30 W
FLUX (3000 K)	511 lm	1366 lm	1707 lm
CURRENT	300 mA	500 mA	700 mA
BEAM ANGLE	Wall wash, tilted 18°, beam 48°	Wall wash, tilted 25°, beam 51°	Wall wash, tilted 20°, beam 40°
DIMENSIONS	74 × 79 mm	93 × 85 mm	113 × 104 mm
CUT-OUT	65 mm	85 mm	105 mm

Product page and enquiries
labos.com.tr/products/downlight/artemon/




EVORIS

Recessed downlight

VERSIONS	POWER	FLUX
3	10–18 W	760–1530 lm

BEAM ANGLE	15° / 24° / 36° / 50°
CCT	3000 / 4000 / 5000 K
CRI	≥90
DIMMING	On request
FINISH	White, Black
LIGHT OPTIONS	Single CCT, dim-to-warm, tunable white
UGR	<19



CODE	U-D1098-COB3	U-D1098-COB4	U-D1098-COB5
DRAWING	 U-D1098-COB3	 U-D1098-COB4	 U-D1098-COB5
POWER	10 W	15 W	18 W
FLUX	760 / 800 / 810 lm	1230 / 1290 / 1305 lm	1530 / 1620 / 1638 lm
EFFICACY	76-81 lm/W	82-87 lm/W	85-91 lm/W
CURRENT	250 mA	350 mA	450 mA

Product page and enquiries
labos.com.tr/products/downlight/evoris/





ZERONA

Recessed downlight

VERSIONS	POWER	FLUX
4	6–25 W	504–1125 lm

CCT	3000 / 4000 / 5000 K
CRI	≥90
DIMMING	On request
FINISH	White, Black
LIGHT OPTIONS	Single CCT, dim-to-warm, tunable white
UGR	<19



CODE	U-D921-C0B2	U-D921-C0B3	U-D921-C0B4	U-D921-C0B5
DRAWING	 U-D921-COB2	 U-D921-COB3	 U-D921-COB4	 U-D921-COB5
POWER	6 W	10 W	15 W	25 W
FLUX	504 / 510 / 540 lm	770 / 830 / 840 lm	1125 / 1200 / 1215 lm	1125 / 1200 / 1215 lm
EFFICACY	84-90 lm/W	77-84 lm/W	75-81 lm/W	75-81 lm/W
CURRENT	150 mA	250 mA	350 mA	600 mA
BEAM ANGLE	15° / 25° / 35°	15° / 25° / 35° / 52°	15° / 25° / 40° / 52°	15° / 25° / 40° / 52°

Product page and enquiries
labos.com.tr/products/downlight/zerona/


TORREA

Recessed downlight

VERSIONS	POWER	FLUX
3	15–32 W	1320–2880 lm

BEAM ANGLE	15° / 24° / 36°
CCT	3000 / 4000 / 5000 K
CRI	≥90
DIMMING	On request
FINISH	White, Black
LIGHT OPTIONS	Single CCT, dim-to-warm, tunable white
IP	IP54



CODE	U-D1104-COB3	U-D1104-COB4	U-D1104-COB5
DRAWING	 U-D1104-COB5		
POWER	15 W	22 W	32 W
FLUX	1320 / 1380 / 1395 lm	2046 / 2112 / 2134 lm	2880 / 3008 / 3040 lm
EFFICACY	88-93 lm/W	96-97 lm/W	90-95 lm/W
CURRENT	350 mA	550 mA	850 mA

Product page and enquiries
labos.com.tr/products/downlight/torrea/


INDEO

Recessed downlight

VERSIONS	POWER	FLUX
1	5 W	275 lm

CCT	3000 / 4000 / 5000 K
CRI	≥90
DIMMING	On request
FINISH	White, Black
LIGHT OPTIONS	Single CCT, dim-to-warm, tunable white
UGR	<IP20
IP	IP54



CODE	U-D881-COB
DRAWING	 U-D881-COB
POWER	5 W
FLUX	275 / 290 / 300 lm
EFFICACY	55-60 lm/W
CURRENT	120 mA
BEAM ANGLE	15° / 24° / 36° / 50°

Product page and enquiries
labos.com.tr/products/downlight/indeo/




INDEO TRIMLESS

Trimless recessed downlight

VERSIONS	POWER	FLUX
4	5–15 W	275–915 lm

BEAM ANGLE	15° / 24° / 36° / 50°
CCT	3000 / 4000 / 5000 K
CRI	≥90
DIMMING	On request
FINISH	White, Black
LIGHT OPTIONS	Single CCT, dim-to-warm, tunable white
UGR	<IP20
IP	IP54



CODE	U-R881-COB	U-D881-COB1	U-R881-COB1	U-R881-COB2
DRAWING	 U-R881-COB	 U-D881-COB1	 U-R881-COB1	 U-R881-COB2
POWER	5 W	10 W	10 W	15 W
FLUX	275 / 290 / 300 lm	610 / 650 / 660 lm	610 / 650 / 660 lm	915 / 975 / 1050 lm
EFFICACY	55-60 lm/W	61-66 lm/W	61-66 lm/W	61-67 lm/W
CURRENT	120 mA	250 mA	250 mA	350 mA

Product page and enquiries
labos.com.tr/products/downlight/indeo-trimless/

SHADOWLUX




Trimless recessed downlight

VERSIONS	POWER	FLUX
4	10–15 W	550–1830 lm

BEAM ANGLE	24° / 36°
CCT	3000 / 4000 / 5000 K
CRI	≥90
DIMMING	On request
FINISH	White, Black
LIGHT OPTIONS	Single CCT, dim-to-warm, tunable white
UGR	<9





CODE	U-D836-C0B	U-D836-C0B1	U-D836-C0B2	U-R836-C0B3
DRAWING				
POWER	10 W	15 W	10 W	10 W
FLUX	550 / 580 / 600 lm	915 / 975 / 990 lm	1220 / 1300 / 1320 lm	1830 / 1950 / 2010 lm
EFFICACY	55-60 lm/W	61-66 lm/W	61-66 lm/W	61-67 lm/W
CURRENT	250 mA	350 mA	500 mA	750 mA

Product page and enquiries
labos.com.tr/products/downlight/shadowlux/

LINTRAVA

Trimless recessed downlight

Plaster-in multi-head downlight with one, two, four, six or nine heads in a single line.


VERSIONS
5

POWER
3–20 W

FLUX
126–1420 lm

HEIGHT	53 mm
CCT	3000 / 4000 / 5000 K
CRI	≥90
DIMMING	On request
FINISH	White, Black
LIGHT OPTIONS	Single CCT, dim-to-warm, tunable white
UGR	<10

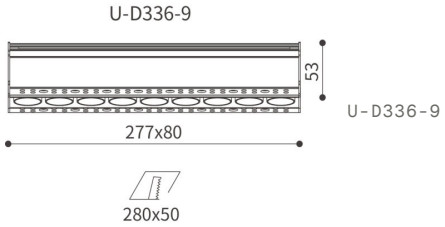

CODE	U-D336-1	U-D336-2	U-D336-4	U-D336-6	U-D336-9
DRAWING					
POWER	3 W	5 W	10 W	15 W	20 W
FLUX	126 / 159 / 195 lm	290 / 330 / 350 lm	630 / 720 / 770 lm	950 / 1080 / 1215 lm	1420 / 1640 / 1840 lm
EFFICACY	42-65 lm/W	58-70 lm/W	63-77 lm/W	63-81 lm/W	71-92 lm/W
CURRENT	500 mA	600 mA	700 mA	700 mA	700 mA
BEAM ANGLE	16° / 24° / 32°	16° / 24° / 32°	16° / 24° / 35°	16° / 24° / 35°	16° / 24° / 35°
DIMENSIONS	37 × 80 mm	67 × 80 mm	127 × 80 mm	187 × 80 mm	277 × 80 mm
CUT-OUT	40 × 50 mm	70 × 50 mm	130 × 50 mm	190 × 50 mm	280 × 50 mm

Product page and enquiries
labos.com.tr/products/downlight/lintrava/

MANNORE SQUARE



Recessed spotlight

VERSIONS	POWER	FLUX
2	10–20 W	710–1460 lm

CURRENT	700 mA
BEAM ANGLE	16° / 24° / 38°
HEIGHT	51 mm
CCT	3000 / 4000 / 5000 K
CRI	≥90
DIMMING	On request
FINISH	White, Black
LIGHT OPTIONS	
UGR	<10





CODE	U-D335-4	U-D335-9
DRAWING		
POWER	10 W	20 W
FLUX	710 / 770 / 780 lm	1460 / 1540 / 1700 lm
EFFICACY	71-78 lm/W	73-85 lm/W
DIMENSIONS	77 × 77 mm	107 × 107 mm
CUT-OUT	70 × 70 mm	100 × 100 mm

Product page and enquiries
labos.com.tr/products/downlight/mannore-square/

MANNORE SURFACE

Surface-mounted downlight


VERSIONS	POWER	FLUX
4	10–20 W	710–1460 lm





CURRENT	700 mA
CCT	3000 / 4000 / 5000 K
CRI	≥90
DIMMING	On request
FINISH	White, Black
LIGHT OPTIONS	Single CCT, dim-to-warm, tunable white
UGR	<10









CODE	U-C400-4	U-D333-4	U-D333-6	U-D333-9
DRAWING	 U-C400-4	 U-D333-4	 U-D333-6	 U-D333-9
POWER	10 W	10 W	15 W	20 W
FLUX	710 / 770 / 780 lm	710 / 770 / 780 lm	950 / 1080 / 1215 lm	1460 / 1540 / 1700 lm
EFFICACY	71-78 lm/W	71-78 lm/W	63-81 lm/W	73-85 lm/W
BEAM ANGLE	16° / 24° / 38°	16° / 24° / 38°	16° / 24° / 35°	16° / 24° / 38°

Product page and enquiries
labos.com.tr/products/downlight/mannore-surface/

VECTOR

Recessed spotlight


VERSIONS
5

POWER
3–20 W

FLUX
126–1420 lm

HEIGHT	50 mm
CCT	3000 / 4000 / 5000 K
CRI	≥90
DIMMING	On request
FINISH	White, Black
LIGHT OPTIONS	Single CCT, dim-to-warm, tunable white
UGR	<10

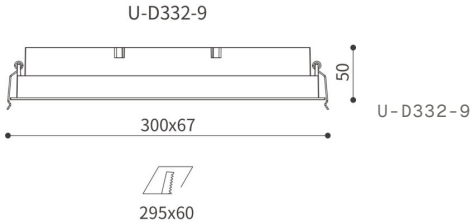

CODE	U-D332-1	U-D332-2	U-D332-4	U-D332-6	U-D332-9
DRAWING					
POWER	3 W	5 W	10 W	15 W	20 W
FLUX	126 / 159 / 195 lm	290 / 330 / 350 lm	630 / 720 / 770 lm	950 / 1080 / 1215 lm	1420 / 1640 / 1840 lm
EFFICACY	42-65 lm/W	58-70 lm/W	63-77 lm/W	63-81 lm/W	71-92 lm/W
CURRENT	500 mA	600 mA	700 mA	700 mA	700 mA
BEAM ANGLE	16° / 24° / 32°	16° / 24° / 32°	16° / 24° / 35° / 50°	16° / 24° / 35°	16° / 24° / 35°
DIMENSIONS	67 × 67 mm	90 × 67 mm	150 × 67 mm	210 × 67 mm	300 × 67 mm
CUT-OUT	60 × 60 mm	85 × 60 mm	145 × 60 mm	205 × 60 mm	295 × 60 mm

Product page and enquiries
labos.com.tr/products/downlight/vector/

MOFX



Trimless recessed spotlight

VERSIONS	POWER	FLUX
2	10–20 W	710–1460 lm

CURRENT	700 mA
BEAM ANGLE	16° / 24° / 38°
HEIGHT	53 mm
CCT	3000 / 4000 / 5000 K
CRI	≥90
DIMMING	On request
FINISH	White, Black
LIGHT OPTIONS	
UGR	<10





CODE	U-D335S-4	U-D335S-9
DRAWING		
POWER	10 W	20 W
FLUX	710 / 770 / 780 lm	1460 / 1540 / 1700 lm
EFFICACY	71-78 lm/W	73-85 lm/W
DIMENSIONS	75 × 75 mm	102 × 102 mm

Product page and enquiries
labos.com.tr/products/downlight/mofx/

ORBIX

Recessed spotlight


VERSIONS	POWER	FLUX
3	6–12 W	420–864 lm

CCT	3000 / 4000 / 5000 K
CRI	≥90
DIMMING	On request
FINISH	White, Black
LIGHT OPTIONS	Single CCT, dim to warm
UGR	<10







CODE	U-D485-C0B3	U-D485-C0B4	U-D485-SMD4
DRAWING	 U-D485-SMD4		
POWER	6 W	12 W	10 W
FLUX	420 / 450 / 456 lm	864 / 936 / 948 lm	710 / 770 / 780 lm
EFFICACY	70-76 lm/W	78-79 lm/W	77-78 lm/W
CURRENT	150 mA	300 mA	700 mA
BEAM ANGLE	16° / 24° / 40° / 60°	16° / 24° / 40° / 55°	16° / 24° / 38°

Product page and enquiries
labos.com.tr/products/downlight/orbix/

PHOTRAN R

Recessed downlight


VERSIONS	POWER	FLUX
3	10–32 W	570–2176 lm

HEIGHT	50 mm
CCT	3000 / 4000 / 5000 K
CRI	≥90
DIMMING	On request
FINISH	White, Black
LIGHT OPTIONS	Single CCT, dim-to-warm, tunable white





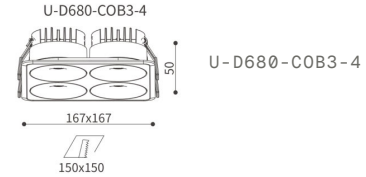

CODE	U-D680-C0B3	U-D680-C0B3-2	U-D680-C0B3-4
DRAWING			
POWER	10 W	20 W	32 W
FLUX	570 / 620 / 630 lm	1260 / 1360 / 1400 lm	2176 / 2336 / 2400 lm
EFFICACY	57-63 lm/W	63-70 lm/W	68-75 lm/W
CURRENT	250 mA	500 mA	800 mA
BEAM ANGLE	25° / 36°	25° / 38°	25° / 38°
DIMENSIONS	92 × 92 mm	167 × 92 mm	167 × 167 mm
CUT-OUT	–	150 × 75 mm	150 × 150 mm

U-D680-C0B3-4

Product page and enquiries
labos.com.tr/products/downlight/photran-r/

PHOTRAN S

Recessed downlight

VERSIONS	POWER	FLUX
3	10–32 W	570–2176 lm

CRI	≥90
DIMMING	On request
FINISH	White, Black
LIGHT OPTIONS	Single CCT, dim-to-warm, tunable white







CODE	U-C680-COB3	U-C680-COB3-2	U-C680-COB3-4
POWER	10 W	20 W	32 W
FLUX	570 / 620 / 630 lm	1260 / 1360 / 1400 lm	2176 / 2336 / 2400 / - / - lm
EFFICACY	57-63 lm/W	63-70 lm/W	68-75 lm/W
CURRENT	250 mA	500 mA	800 mA
BEAM ANGLE	25° / 36°	25° / 38°	25° / 38°
CCT	3000 / 4000 / 5000 K	3000 / 4000 / 5000 K	3000 / 4000 / 5000 / 46 / 86x86 K

Product page and enquiries
labos.com.tr/products/downlight/photran-s/

PHOTRAN T


Recessed downlight

VERSIONS	POWER	FLUX
3	10–32 W	570–2176 lm

CCT	3000 / 4000 / 5000 K
CRI	≥90
DIMMING	On request
FINISH	White, Black
LIGHT OPTIONS	Single CCT, dim-to-warm, tunable white





CODE	U-T680-COB3	U-T680-COB3-2	U-T680-COB3-4
DRAWING	 U-T680-COB3-2		
POWER	10 W	20 W	32 W
FLUX	570 / 620 / 630 lm	1260 / 1360 / 1400 lm	2176 / 2336 / 2400 lm
EFFICACY	57-63 lm/W	63-70 lm/W	68-75 lm/W
CURRENT	250 mA	500 mA	800 mA
BEAM ANGLE	25° / 36°	26° / 38°	26° / 38°

Product page and enquiries
labos.com.tr/products/downlight/photran-t/


CALTRIVA F

Recessed downlight

VERSIONS	POWER	FLUX
2	8–16 W	784–1010 lm

BEAM ANGLE	100°
CCT	3000 / 4000 / 5000 K
CRI	≥90
DIMMING	On request
FINISH	White, Black, Gold, Nickel, Terra
UGR	<19

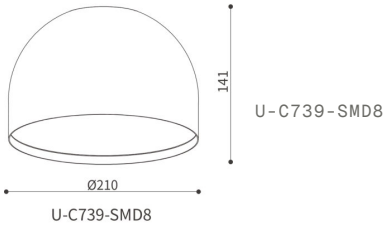

CODE	U-C739-SMD6	U-C739-SMD8
DRAWING		
POWER	8 W	16 W
FLUX	784 / 808 / 824 lm	1010 / 1050 / 1555 lm
EFFICACY	98-103 lm/W	86-97 lm/W
CURRENT	200 mA	250 mA

Product page and enquiries
labos.com.tr/products/downlight/caltriva-f/

CALTRIVA R



Recessed downlight

VERSIONS	POWER	FLUX
2	6–12 W	552–1068 lm

BEAM ANGLE	100°
CCT	3000 / 4000 / 5000 K
CRI	≥90
DIMMING	On request
FINISH	White, Black, Gold, Nickel, Terra
UGR	<21





CODE	U-D752-SMD4	U-D739-SMD6
DRAWING	 U-D752-SMD4	 U-D739-SMD6
POWER	6 W	12 W
FLUX	552 / 600 / 618 lm	1068 / 1116 / 1104 lm
EFFICACY	100-103 lm/W	89-93 lm/W
CURRENT	200 mA	300 mA

Product page and enquiries
labos.com.tr/products/downlight/caltriva-r/

CALTRIVA S


Recessed downlight

VERSIONS	POWER	FLUX
2	6–12 W	552–1068 lm

BEAM ANGLE	100°
CCT	3000 / 4000 / 5000 K
CRI	≥90
DIMMING	On request
FINISH	White, Black, Gold, Nickel, Terra, Red
UGR	<21





CODE	U-E752-SMD4	U-E739-SMD6
DRAWING		
POWER	6 W	12 W
FLUX	552 / 600 / 618 lm	1068 / 1116 / 1104 lm
EFFICACY	92-103 lm/W	92-93 lm/W
CURRENT	250 mA	300 mA

U-E739-SMD6

Product page and enquiries
labos.com.tr/products/downlight/caltriva-s/

MERALUX

Recessed multi-head downlight

VERSIONS	POWER	FLUX
3	10–20 W	570–1260 lm

CCT	3000 / 4000 / 5000 K
CRI	≥90
DIMMING	On request
FINISH	White, Black
LIGHT OPTIONS	Single CCT, dim-to-warm, tunable white



CODE	U-D1101-COB2R	U-D1102-COB2-2	U-D1103-COB2
POWER	10 W	20 W	10 W
FLUX	840 / 880 / 890 lm	1260 / 1360 / 1400 lm	570 / 620 / 630 lm
EFFICACY	84-89 lm/W	63-70 lm/W	57-63 lm/W
CURRENT	250 mA	500 mA	250 mA
BEAM ANGLE	15° / 24° / 36° / 50°	25° / 38°	25° / 36°

Product page and enquiries
labos.com.tr/products/downlight/meralux/

STRIX

Recessed spotlight

VERSIONS	POWER	FLUX
2	15 W	1425 lm

DIMMING On request



CODE	U-T1009-COB3-M	U-T1009-COB3-M
POWER	15 W	–
FLUX	1425 / 1590 / 1620 lm	–
EFFICACY	95-108 lm/W	–
CURRENT	350 mA	–
BEAM ANGLE	18° / 24° / 36° / 60°	200
CCT	3000 / 4000 / 5000 K	K
CRI	≥90	–

Product page and enquiries
labos.com.tr/products/downlight/strix/

PERANOVA

Adjustable recessed spotlight

VERSIONS	POWER	FLUX
26	2–9.3 W	945–976 lm

CCT	3000 K, 1800–3000 K DTW
CRI	80 / 90
IP	IP20 / IP44



26 VERSIONS



Peranova S R Adjust + S R Kit 1-Peranova S R

4 VERSIONS, P. 039



Peranova S R Adjust-Peranova R Low Adjust

4 VERSIONS, P. 040



Peranova R-Peranova SQ

4 VERSIONS, P. 041



Peranova SQ Wall Wash-Peranova SQ Adjust-GU10

4 VERSIONS, P. 042



Peranova SQ Low Adjust-MR16-Peranova R Adjust-GU10

4 VERSIONS, P. 043



Peranova R Low Adjust-MR16-Peranova SQ Kit 2

4 VERSIONS, P. 044



Peranova SQ H Kit 1-Peranova SQ H Kit 2

2 VERSIONS, P. 045

Product page and enquiries
labos.com.tr/products/downlight/peranova/

PERANOVA

Adjustable recessed spotlight

VERSIONS 1-4 OF 26

	CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	CUT-OUT	UGR	ADJUSTMENT
	**Peranova S R Adjust + S R Kit 1**	6 W	–	–	19° / 24° / 34°	Ø44 × 51 mm	Ø57 mm	<10 / <11 / <15	Adjustable
	**Peranova S R Adjust×2 + S R Kit 2**	2×6 W	–	–	19° / 24° / 34°	Ø44 × 51 mm per module	57 × 124 mm	<10 / <11 / <15	Adjustable
	**Peranova S R Wall Wash + S R Kit 1**	7 W	–	–	Asymmetric	Ø44 × 54 mm	Ø57 mm	–	–
	**Peranova S R**	6 W	–	–	19° / 24° / 34°	Ø44 × 51 mm	–	<10 / <11 / <15	–

PERANOVA Adjustable recessed spotlight

VERSIONS 5-8 OF 26

	CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	CUT-OUT	UGR	ADJUSTMENT
	**Peranova S R Adjust**	6 W	–	–	19° / 24° / 34°	Ø44 × 51 mm	–	<10 / <11 / <15	Adjustable
	**Peranova S R Wall Wash**	7 W	–	–	Asymmetric	Ø44 × 54 mm	–	–	–
	**Peranova R Adjust**	8.9 W / 9 W	976–1173 lm / 14–864 lm	500 mA	24° / 34° / 46°	Ø68 × 100 mm	–	–	Tilt 0–24°, rotation 350°
	**Peranova R Low Adjust**	8.9 W / 9 W	976–1173 lm / 14–864 lm	500 mA	24° / 34° / 46°	Ø68 × 88 mm	–	–	Tilt 0–24°, rotation 350°

PERANOVA Adjustable recessed spotlight

VERSIONS 9-12 OF 26

	CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	CUT-OUT	UGR	ADJUSTMENT
	**Peranova R**	8.9 W / 9 W	976–1173 lm / 14–864 lm	500 mA	24° / 34° / 46°	Ø68 × 78 mm	–	–	Fixed
	**Peranova SQ Adjust**	8.9 W / 9 W	976–1173 lm / 14–864 lm	500 mA	24° / 34° / 46°	68 × 68 × 100 mm	–	–	Tilt 0–24°, rotation 350°
	**Peranova SQ Low Adjust**	8.9 W / 9 W	976–1173 lm / 14–864 lm	500 mA	24° / 34° / 46°	68 × 68 × 90 mm	–	–	Tilt 0–24°, rotation 350°
	**Peranova SQ**	8.9 W / 9 W	976–1173 lm / 14–864 lm	500 mA	24° / 34° / 46°	68 × 68 × 78 mm	–	–	Fixed

PERANOVA

Adjustable recessed spotlight


VERSIONS 13-16 OF 26

	CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	CUT-OUT	UGR	ADJUSTMENT
	**Peranova SQ Wall Wash**	9.3 W	945–1100 lm	350 mA	Asymmetric	68 × 68 × 55 mm	–	–	Fixed
	**Peranova R Wall Wash**	9.3 W	945–1100 lm	350 mA	Asymmetric	Ø68 × 55 mm	–	–	Fixed
	**Peranova SQ Adjust-MR16**	7.5 W	–	–	–	68 × 68 × 97 mm	–	–	Tilt 0–24°, rotation 350°
	**Peranova SQ Adjust-GU10**	7.5 W	–	–	–	68 × 68 × 114 mm	–	–	Tilt 0–24°, rotation 350°

PERANOVA

Adjustable recessed spotlight

VERSIONS 17-20 OF 26

	CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	CUT-OUT	UGR	ADJUSTMENT
	**Peranova SQ Low Adjust-MR16**	7.5 W	–	–	–	68 × 68 × 83 mm	–	–	Tilt 0–24°, rotation 350°
	**Peranova SQ Low Adjust-GU10**	7.5 W	–	–	–	68 × 68 × 100 mm	–	–	Tilt 0–24°, rotation 350°
	**Peranova R Adjust-MR16**	7.5 W	–	–	–	Ø68 × 97 mm	–	–	Tilt 0–24°, rotation 350°
	**Peranova R Adjust-GU10**	7.5 W	–	–	–	Ø68 × 114 mm	–	–	Tilt 0–24°, rotation 350°

PERANOVA

Adjustable recessed spotlight

VERSIONS 21-24 OF 26

	CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	CUT-OUT	UGR	ADJUSTMENT
	**Peranova R Low Adjust-MR16**	7.5 W	–	–	–	Ø68 × 83 mm	–	–	Tilt 0–24°, rotation 350°
	**Peranova R Low Adjust-GU10**	7.5 W	–	–	–	Ø68 × 100 mm	–	–	Tilt 0–24°, rotation 350°
	**Peranova SQ Kit 1**	–	–	–	–	83 × 83 × 40 mm	76 × 76 mm	–	–
	**Peranova SQ Kit 2**	–	–	–	–	154 × 83 × 40 mm	145 × 76 mm	–	–

PERANOVA

Adjustable recessed spotlight

	CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	CUT-OUT	UGR	ADJUSTMENT
	Peranova SQ H Kit 1	–	–	–	–	75 × 143 × 61 mm	83 × 78 mm	–	–
	Peranova SQ H Kit 2	–	–	–	–	124 × 130 × 61 mm	146 × 83 mm	–	–

AURIS

Recessed spotlight

VERSIONS	POWER	FLUX
7	9–22 W	976 lm

CCT	3000 K, 1800–3000 K DTW
CRI	80 / 90
IP	IP20 / IP44
DIMMING	On/off / TRIAC



7 CONFIGURATIONS




Auris RD Adj/Fix

1 VERSION, P. 047




Auris Mini SQ2 S60 G2 2

1 VERSION, P. 047




Auris Mini SQ S60 G2

1 VERSION, P. 047



Auris Mini R S60 G2

1 VERSION, P. 047



Auris Mini R2 S60 G2 2

1 VERSION, P. 048



Auris IP

1 VERSION, P. 048



Auris Mini S60 Hide





1 VERSION, P. 048

Product page and enquiries
labos.com.tr/products/downlight/auris-downlight/

AURIS

Recessed spotlight



VERSIONS 1-4 OF 7

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	CUT-OUT	ADJUSTMENT
		**Auris RD Adj/Fix**	–	–	–	–	–	–	Fixed or tilting versions
		**Auris Mini SQ2 S60 G2 2**	22 W / 2×7.5 W	–	–	24° / 33° / 50°	192 × 100 × 114 mm	–	–
		**Auris Mini SQ S60 G2**	11 W / 7.5 W	–	–	24° / 33° / 50°	100 × 100 × 114 mm	–	–
		**Auris Mini R S60 G2**	11 W / 7.5 W	–	–	24° / 33° / 50°	Ø100 × 114 mm	–	–

AURIS

Recessed spotlight

VERSIONS 5-7 OF 7

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	CUT-OUT	ADJUSTMENT
		**Auris Mini R2 S60 G2 2**	22 W / 2×7.5 W	–	–	24° / 33° / 50°	192 × 100 × 114 mm	–	–
		**Auris IP**	–	–	–	–	–	–	–
		**Auris Mini S60 Hide**	9 / 12 W	976 / 1356 lm	500 mA / 350 mA	24° / 34° / 48°, 25° / 36° / 50°	Ø97 × 124 mm	Ø114 mm	Tilt 0–60°, rotation 350°

DEEPLUX

Recessed downlight







VERSIONS	POWER
5	6–8.7 W

CRI	90
IP	IP65
DIMMING	On/off / TRIAC

CODE	Deeplux 68	Deeplux 51	Deeplux 68 Kea	Deeplux 51 Kea	Deeplux RD76
POWER	8.7 W / 7.5 W	6 W / 4.5 W	8.7 W / 7.5 W	6 W / 4.5 W	–
BEAM ANGLE	36° / 48°	36° / 48°	36° / 48°	36° / 48°	–
CUT-OUT	Ø68 mm	Ø51 mm	Ø68 mm	Ø51 mm	–


Product page and enquiries
labos.com.tr/products/downlight/deeplux/

CARMEA

Mini recessed spotlight

VERSIONS	POWER
5	5–7 W

CRI	90
IP	IP20 / IP44
DIMMING	TRIAC














CODE	Carmea SF	Carmea SA	Carmea SAL	Carmea Kit 1	Carmea Kit 2
DRAWING			 		
POWER	5 W	5 W	7 W	–	–
BEAM ANGLE	24° / 36°	24° / 36°	24° / 36°	–	–
DIMENSIONS	Ø30 × 90 mm	Ø30 × 94 mm	Ø30 × 140 mm	Ø50 × 80 mm	95 × 50 × 80 mm
CUT-OUT	–	–	–	Ø42 mm	2 × Ø42 mm, spacing 45 mm
UGR	<13 / <16	<13 / <16	<13 / <16	–	–
ADJUSTMENT	Fixed	Short tiltable	Long tiltable	–	–

Product page and enquiries
labos.com.tr/products/downlight/carmea/

INARON

Recessed spotlight

VERSIONS	POWER
2	8.9 W

CRI	90
IP	IP20 / IP44





CODE	Inaron G2 SQ	Inaron G2 R
DRAWING		
POWER	8.9 W	8.9 W
BEAM ANGLE	26° / 38°	26° / 38°
DIMENSIONS	75 × 75 × 56 / 64 mm	Ø82 × 53 / 61 mm
CUT-OUT	68 × 68 mm	Ø68 mm

Product page and enquiries
labos.com.tr/products/downlight/inaron/


BARRA

Semi-recessed spotlight

VERSIONS	POWER
1	10 W

CRI	90
IP	IP20

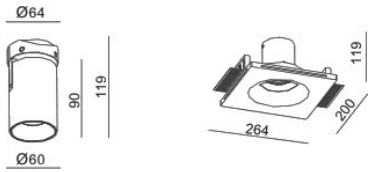

CODE	Barra S60
DRAWING	
POWER	10 W
BEAM ANGLE	24° / 34° / 48°
DIMENSIONS	Ø64 × 119 mm

Product page and enquiries
labos.com.tr/products/downlight/barra-downlight/

PROFOND

Recessed spotlight

VERSIONS	POWER
2	10.8 W

CRI	90
IP	IP54





CODE	Profond Plus RD	Profond Plus RD Fixed
DRAWING		
POWER	10.8 / 11.8 W	10.8 / 11.8 W
BEAM ANGLE	37° / 48°	37° / 48°
DIMENSIONS	Ø92 × 85 mm	Ø76 × 85 mm
CUT-OUT	Ø83 mm	Ø68 mm
UGR	<11 / <13	<11 / <13
ADJUSTMENT	–	Fixed

Product page and enquiries
labos.com.tr/products/downlight/profond-downlight/

LUNET



Recessed spotlight

VERSIONS	POWER
2	12.2 W

CRI	90
IP	IP54





CODE	Lunet Extra RD	Lunet Extra RD Fixed
DRAWING		
POWER	12.2 W	12.2 W
BEAM ANGLE	22° / 38° / 48°	22° / 38° / 48°
DIMENSIONS	Ø103 × 82 mm	Ø84 × 81 mm
CUT-OUT	Ø95 mm	Ø76 mm
ADJUSTMENT	Tilt	Fixed


Product page and enquiries
labos.com.tr/products/downlight/lunet/

LUMETRIX

Recessed linear spotlight

VERSIONS	POWER	FLUX
11	1.5–21 W	126–2000 lm

CCT	3000 K
CRI	80 / 90
IP	IP20 / IP43

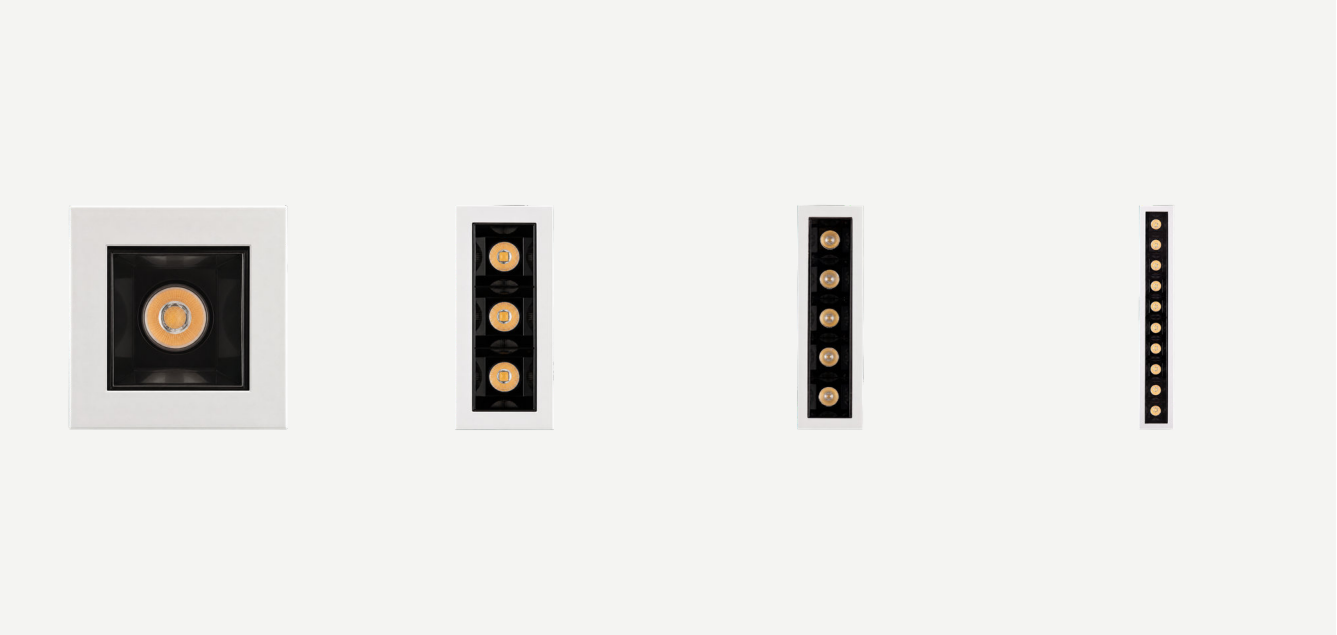

11 CONFIGURATIONS



Lumetrix Mini 1

1 VERSION, P. 056



Lumetrix Mini 3

1 VERSION, P. 056



Lumetrix Mini 5

1 VERSION, P. 056

Lumetrix Mini 10

1 VERSION, P. 056



Lumetrix Mini Hide 3

1 VERSION, P. 057



Lumetrix Mini Hide 5

1 VERSION, P. 057




Lumetrix Mini Hide 10

1 VERSION, P. 057



Lumetrix Mini Adjust 5

1 VERSION, P. 057




Lumetrix Mini Adjust 10

1 VERSION, P. 058



Lumetrix Wall Wash 5

1 VERSION, P. 058



Lumetrix Wall Wash 10





1 VERSION, P. 058

Product page and enquiries
labos.com.tr/products/downlight/lumetrix-downlight/

LUMETRIX

Recessed linear spotlight





VERSIONS 1-4 OF 11

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	CUT-OUT	UGR	ADJUSTMENT
		**Lumetrix Mini 1**	1.5–2 W	126–140 lm	500–700 mA	13° / 36° / 46°	30 × 30 × 48 mm	24 × 24 mm	<7 / <3 / <15	Fixed
		**Lumetrix Mini 3**	3×1.5–2 W	342–481 lm	500–700 mA	13° / 36° / 46°	30 × 66 × 50 mm	60 × 24 mm	<7 / <3 / <12	Fixed
		**Lumetrix Mini 5**	5×1.5–2 W	464–589 lm	500–700 mA	13° / 36° / 46°	30 × 102 × 50 mm	96 × 24 mm	<5 / <3 / <12	Fixed
		**Lumetrix Mini 10**	10×1.5–2 W	985–1204 lm	500–700 mA	13° / 36° / 48°	30 × 193 × 50 mm	187 × 24 mm	<5 / <3 / <12	Fixed

LUMETRIX

Recessed linear spotlight




VERSIONS 5-8 OF 11

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	CUT-OUT	UGR	ADJUSTMENT
		**Lumetrix Mini Hide 3**	4.5 W	438–474 lm	500 mA	13° / 36° / 47°	130 × 38 × 58 mm	67 × 39 mm	–	Fixed
		**Lumetrix Mini Hide 5**	7.5 W	730–790 lm	500 mA	13° / 36° / 47°	166 × 38 × 58 mm	103 × 39 mm	–	Fixed
		**Lumetrix Mini Hide 10**	15 W	1460–1580 lm	500 mA	13° / 36° / 47°	257 × 38 × 58 mm	194 × 39 mm	–	Fixed
		**Lumetrix Mini Adjust 5**	10 W	730–1050 lm	500–700 mA	13° / 36° / 47°	124 × 53 × 50 mm	116 × 45 mm	–	Adjustable 30°

LUMETRIX

Recessed linear spotlight

VERSIONS 9-11 OF 11

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	CUT-OUT	UGR	ADJUSTMENT
		**Lumetrix Mini Adjust 10**	21 W	1460–2100 lm	500–700 mA	13° / 36° / 47°	215 × 53 × 50 mm	207 × 45 mm	–	Adjustable 30°
		**Lumetrix Wall Wash 5**	10 W	1000–1075 lm	700 mA	Asymmetric	137 × 44 × 60 / 124 × 31 × 80 mm	130 × 37 / 137 × 51 mm	–	Fixed
		**Lumetrix Wall Wash 10**	21 W	2000–2150 lm	700 mA	Asymmetric	257 × 44 × 60 / 244 × 31 × 80 mm	250 × 37 / 257 × 51 mm	–	Fixed


GIZNOVA

Recessed spotlight

VERSIONS	POWER	FLUX
1	9 W	976 lm

ADJUSTMENT	Tilt 0–30°, rotation 350° / 355°
CCT	3000 K
CRI	80 / 90
IP	IP20
VOLTAGE	220–240 V



CODE	Giznova R
DRAWING	
POWER	9 W / GU10 max 50 W
FLUX	976–1173 lm
CURRENT	500 mA
BEAM ANGLE	24° / 34° / 48°
DIMENSIONS	Ø110 × 85 / 95 mm
CUT-OUT	Ø100 mm

Product page and enquiries
labos.com.tr/products/downlight/giznova-downlight/

LUXORA

Recessed spotlight

VERSIONS	POWER	FLUX
44	6–18 W	14–1835 lm

ADJUSTMENT	Tilt 0–30°, rotation 355°
CCT	2700 / 3000 K, 1800–3000 K DTW
CRI	80 / 90
IP	IP20
VOLTAGE	12 V / 220–240 V



44 VERSIONS



Luxora R XS-6W-Luxora R S Focus

5 VERSIONS, P. 061



Luxora R S-9W-Luxora R S Hide-9W

5 VERSIONS, P. 062



Luxora R S Hide-9W DTW-Luxora SQ S-9W DTW

5 VERSIONS, P. 063



Luxora SQ S-MR16-Luxora SQ S Hide-MR16

5 VERSIONS, P. 064



Luxora R M Focus-Luxora R M Focus Hide

5 VERSIONS, P. 065



Luxora R M Hide-13W-Luxora SQ M-13W

5 VERSIONS, P. 066



Luxora SQ M-12W DTW-Luxora SQ M Hide-12W DTW

5 VERSIONS, P. 067



Luxora SQ M Hide-MR16-Luxora R L Hide

5 VERSIONS, P. 068



Luxora SQ L Focus-Luxora SQ L Hide



4 VERSIONS, P. 069

Product page and enquiries
labos.com.tr/products/downlight/luxora/

LUXORA

Recessed spotlight



VERSIONS 1-5 OF 44

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	CUT-OUT	UGR
		Luxora R XS-6W	6 W	277–278 lm	350 mA	24° / 36°	Ø57 × 92 mm	Ø51 mm	–
		Luxora R XS-6W DTW	6 W	309 lm	350 mA	34°	Ø57 × 92 mm	Ø51 mm	–
		Luxora R XS Hide-6W	6 W	735 lm / 781 lm	350 mA	24° / 36°	116 × 56 × 92 mm	Ø51 mm	–
		Luxora R XS Hide-6W DTW	6 W	15–660 lm	350 mA	34°	116 × 56 × 92 mm	Ø51 mm	–
		Luxora R S Focus	8 W	417–500 lm	250 mA	15–34°	Ø75 × 86 mm	Ø68 mm	<9

LUXORA

Recessed spotlight






VERSIONS 6-10 OF 44

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	CUT-OUT	UGR
		**Luxora R S-9W**	9 W	664–740 lm	250 mA	18° / 26° / 34°	Ø75 × 98 mm	Ø68 mm	<6
		**Luxora R S-9W DTW**	9 W	14–864 lm	500 mA	25° / 34° / 48°	Ø75 × 98 mm	Ø68 mm	–
		**Luxora R S-MR16**	7.5 W	–	–	–	Ø75 × 94 / 105 mm	Ø68 mm	–
		**Luxora R S Focus Hide**	8 W	417–500 lm	250 mA	15–34°	123 × 65 × 86 mm	Ø76 mm	<9
		**Luxora R S Hide-9W**	9 W	664–740 lm	250 mA	18° / 26° / 34°	123 × 65 × 98 mm	Ø76 mm	<6

LUXORA






Recessed spotlight

VERSIONS 11-15 OF 44

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	CUT-OUT	UGR
		**Luxora R S Hide-9W DTW**	9 W	14–864 lm	500 mA	25° / 34° / 48°	123 × 65 × 98 mm	Ø76 mm	–
		**Luxora R S Hide-MR16**	7.5 W	–	–	–	123 × 65 × 94 / 125 × 65 × 105 mm	Ø76 mm	–
		**Luxora SQ S Focus**	8 W	425–498 lm	250 mA	15–34°	75 × 75 × 86 mm	68 × 68 mm	<6 to <7
		**Luxora SQ S-9W**	9 W	667–738 lm	250 mA	18° / 26° / 34°	75 × 75 × 98 mm	68 × 68 mm	<4 to <6
		**Luxora SQ S-9W DTW**	9 W	14–864 lm	500 mA	25° / 34° / 48°	75 × 75 × 98 mm	68 × 68 mm	–

LUXORA Recessed spotlight






VERSIONS 16-20 OF 44

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	CUT-OUT	UGR
		**Luxora SQ S-MR16**	7.5 W	–	–	–	75 × 75 × 101 / 105 mm	68 × 68 mm	–
		**Luxora SQ S Focus Hide**	8 W	425–498 lm	250 mA	15–34°	125 × 65 × 86 mm	68 × 68 mm	<6 to <7
		**Luxora SQ S Hide-9W**	9 W	667–738 lm	250 mA	18° / 26° / 34°	125 × 65 × 98 mm	68 × 68 mm	<4 to <6
		**Luxora SQ S Hide-9W DTW**	9 W	14–864 lm	500 mA	25° / 34° / 48°	125 × 65 × 98 mm	68 × 68 mm	–
		**Luxora SQ S Hide-MR16**	7.5 W	–	–	–	125 × 65 × 94 / 123 × 65 × 105 mm	68 × 68 mm	–

LUXORA

Recessed spotlight






VERSIONS 21-25 OF 44

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	CUT-OUT	UGR
		**Luxora R M Focus**	13 W	1107–1146 lm	350 mA	15–34°	Ø108 × 118 mm	Ø102 mm	<3
		**Luxora R M-13W**	13 W	948–1039 lm	350 mA	18° / 31° / 50°	Ø108 × 108 mm	Ø102 mm	<11
		**Luxora R M-12W DTW**	12 W	36–1265 lm	350 mA	25° / 33° / 50°	Ø108 × 108 mm	Ø102 mm	–
		**Luxora R M-MR16**	7.5 W	–	–	–	Ø108 × 101 / 115 mm	Ø102 mm	–
		**Luxora R M Focus Hide**	13 W	1107–1146 lm	350 mA	15–34°	161 × 100 × 118 mm	Ø114 mm	<3

LUXORA

Recessed spotlight








VERSIONS 26-30 OF 44

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	CUT-OUT	UGR
		**Luxora R M Hide-13W**	13 W	948–1039 lm	350 mA	18° / 31° / 50°	161 × 100 × 108 mm	Ø114 mm	<11
		**Luxora R M Hide-12W DTW**	12 W	36–1265 lm	350 mA	25° / 33° / 50°	161 × 100 × 108 mm	Ø114 mm	–
		**Luxora R M Hide-MR16**	7.5 W	–	–	–	161 × 100 × 101 / 115 mm	Ø114 mm	–
		**Luxora SQ M Focus**	13 W	1130–1158 lm	350 mA	15–34°	118 × 118 × 118 mm	102 × 102 mm	<3
		**Luxora SQ M-13W**	13 W	955–1042 lm	350 mA	18° / 31° / 50°	118 × 118 × 108 mm	102 × 102 mm	<7 to <11

LUXORA

Recessed spotlight





VERSIONS 31-35 OF 44

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	CUT-OUT	UGR
		**Luxora SQ M-12W DTW**	12 W	36–1265 lm	350 mA	25° / 33° / 50°	118 × 118 × 108 mm	102 × 102 mm	–
		**Luxora SQ M-MR16**	7.5 W	–	–	–	118 × 118 × 101 / 115 mm	102 × 102 mm	–
		**Luxora SQ M Focus Hide**	13 W	1130–1158 lm	350 mA	15–34°	156 × 97 × 118 mm	102 × 102 mm	<3
		**Luxora SQ M Hide-13W**	13 W	955–1042 lm	350 mA	18° / 31° / 50°	156 × 97 × 108 mm	102 × 102 mm	<7 to <11
		**Luxora SQ M Hide-12W DTW**	12 W	36–1265 lm	350 mA	25° / 33° / 50°	156 × 97 × 108 mm	102 × 102 mm	–

LUXORA

Recessed spotlight







VERSIONS 36-40 OF 44

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	CUT-OUT	UGR
		Luxora SQ M Hide-MR16	7.5 W	–	–	–	156 × 97 × 101 / 115 mm	102 × 102 mm	–
		Luxora R L Focus	18 W	1780–1872 lm	500 mA	15–36°	Ø138 × 143 mm	Ø127 mm	<3
		Luxora R L	18 W	1826–1847 lm	500 mA	15° / 24° / 36°	Ø138 × 143 mm	Ø127 mm	<3
		Luxora R L Focus Hide	18 W	1780–1872 lm	500 mA	15–36°	187 × 126 × 143 mm	Ø140 mm	<3
		Luxora R L Hide	18 W	1826–1847 lm	500 mA	15° / 24° / 36°	187 × 126 × 143 mm	Ø140 mm	<3

LUXORA

Recessed spotlight

VERSIONS 41-44 OF 44

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	CUT-OUT	UGR
		**Luxora SQ L Focus**	18 W	1816–1881 lm	500 mA	15–36°	138 × 138 × 143 mm	127 × 127 mm	<3
		**Luxora SQ L**	18 W	1835–1858 lm	500 mA	15° / 24° / 36°	138 × 138 × 143 mm	127 × 127 mm	<3
		**Luxora SQ L Focus Hide**	18 W	1816–1881 lm	500 mA	15–36°	185 × 126 × 143 mm	127 × 127 mm	<3
		**Luxora SQ L Hide**	18 W	1835–1858 lm	500 mA	15° / 24° / 36°	185 × 126 × 143 mm	127 × 127 mm	<3

DRACON

Recessed multi-head spotlight

VERSIONS	POWER	FLUX
8	2–18 W	2–1987 lm

CCT	3000 K, 1800–3000 K DTW
CRI	80 / 90
IP	IP20
DIMMING	TRIAC



8 CONFIGURATIONS



Dracon Mini 40

1 VERSION, P. 071



Dracon Mini 40 2

1 VERSION, P. 071



Dracon Mini 40 Hide

1 VERSION, P. 071



Dracon Mini 40 2 Hide

1 VERSION, P. 071



Dracon

1 VERSION, P. 072



Dracon 2

1 VERSION, P. 072



Dracon Hide

1 VERSION, P. 072



Dracon 2 Hide







1 VERSION, P. 072

Product page and enquiries
labos.com.tr/products/downlight/dracon/

DRACON

Recessed multi-head spotlight





VERSIONS 1-4 OF 8

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	CUT-OUT	ADJUSTMENT
		**Dracon Mini 40**	4.6 / 7.1 / 8.1 W	395–928 lm	500 mA / 350 mA / 450 mA	18° / 29° / 48° or 24° / 34° / 48° or 25° / 34° / 48°	83 × 83 × 103 mm	68 × 68 mm	Tilt 0–90°, rotation 350°
		**Dracon Mini 40 2**	2×4.6 / 2×7.1 / 2×8.1 W	2×395–2×928 lm	500 mA / 350 mA / 450 mA	18° / 29° / 48° or 24° / 34° / 48° or 25° / 34° / 48°	151 × 83 × 103 mm	128 × 68 mm	Tilt 0–90°, rotation 350°
		**Dracon Mini 40 Hide**	4.6 / 7.1 / 9 W	395–928 lm	500 mA / 350 mA / 450 mA	18° / 29° / 48° or 24° / 34° / 48°	68 × 68 × 103 mm	92 × 92 mm	Tilt 0–90°, rotation 350°
		**Dracon Mini 40 2 Hide**	2×4.6 / 2×7.1 / 2×9 W	2×395–2×928 lm	500 mA / 350 mA / 450 mA	18° / 29° / 48° or 24° / 34° / 48°	136 × 68 × 103 mm	152 × 92 mm	Tilt 0–90°, rotation 350°

DRACON

Recessed multi-head spotlight

VERSIONS 5-8 OF 8

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	CUT-OUT	ADJUSTMENT
		**Dracon**	18 W / 28 W	1987–2395 lm / 3161–3810 lm	500 mA / 800 mA	18° / 32° / 50°	145 × 145 × 135 mm	132 × 132 mm	Tilt 0–80°, rotation 350°
		**Dracon 2**	2×18 W / 2×28 W	1987–2395 lm / 3161–3810 lm	500 mA / 800 mA	18° / 32° / 50°	290 × 145 × 135 mm	272 × 132 mm	Tilt 0–80°, rotation 350°
		**Dracon Hide**	18 W / 28 W	1987–2395 lm / 3161–3810 lm	500 mA / 800 mA	18° / 32° / 50°	125 × 125 × 133 mm	147 × 147 mm	Tilt 0–80°, rotation 350°
		**Dracon 2 Hide**	2×18 W / 2×28 W	1987–2395 lm / 3161–3810 lm	500 mA / 800 mA	18° / 32° / 50°	270 × 125 × 133 mm	292 × 147 mm	Tilt 0–80°, rotation 350°

DELTERRA

Recessed downlight

VERSIONS	POWER	FLUX
17	4.7–18.1 W	476–1887 lm

CCT	3000 K
CRI	80 / 90
IP	IP20 / IP54



17 VERSIONS



Delterra Midi-Delterra Midi Fixed

4 VERSIONS, P. 074




Delterra Fixed-13W-Delterra Mini Fixed

4 VERSIONS, P. 075



Delterra Mini Fixed-9W-Delterra Mini WW

4 VERSIONS, P. 076



Delterra Mini WW Hide-Delterra OK G2

4 VERSIONS, P. 077



Delterra OK G2 Hide

1 VERSION, P. 078

Product page and enquiries
labos.com.tr/products/downlight/delterra/

DELTERRA Recessed downlight

VERSIONS 1-4 OF 17

	CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	CUT-OUT	ADJUSTMENT
	**Delterra Midi**	12.2–18.1 W / 17.6–25.7 W	1356–2296 lm / 1840–2980 lm	350–500 mA / 500–700 mA	Reflector 20° / 28° / 40°, lens 15° / 24° / 40°	Ø125 × 118 mm	Ø114 mm	Tilt 0–20°, rotation 360°
	**Delterra G2**	8.9 W / 12.9 W	976–1173 lm / 1208–1439 lm	500 mA / 350 mA	Reflector 24° / 34° / 46°	Ø91 × 100 mm	Ø83 mm	Tilt 0–20°, rotation 360°
	**Delterra Mini**	6.6 W / 9.2 W	668–809 lm / 890–1077 lm	700 mA / 300 mA	Reflector 32° / 44°	Ø64 × 78 / 93 mm	Ø57 mm	Tilt 0–20°, rotation 360°
	**Delterra Midi Fixed**	12.2–18.1 W / 17.6–25.7 W	1356–1887 lm / 1840–2501 lm	350–500 mA / 500–700 mA	32° / 50° and 30° / 45°	Ø125 × 122 mm	Ø114 mm	Fixed

DELTERRA Recessed downlight

VERSIONS 5-8 OF 17

	CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	CUT-OUT	ADJUSTMENT
	**Delterra Fixed-13W**	12.9 W	1208 lm	350 mA	30° / 42°	Ø91 × 87 mm	Ø83 mm	Fixed
	**Delterra Fixed**	8.9 W	976 lm	500 mA	36° / 50°	Ø91 × 80 mm	Ø83 mm	Fixed
	Delterra Mini 31 Fixed	4.7 W	476 lm	500 mA	32° / 45°	Ø35 × 70 mm	Ø30 mm	Fixed
	**Delterra Mini Fixed**	6.6 W	668 lm	700 mA	30° / 42°	Ø64 × 78 mm	Ø57 mm	Fixed


DELTERRA Recessed downlight

VERSIONS 9-12 OF 17

	CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	CUT-OUT	ADJUSTMENT
	**Delterra Mini Fixed-9W**	9.2 W	890 lm	300 mA	30° / 42°	Ø64 × 93 mm	Ø57 mm	Fixed
	**Delterra Midi WW**	18.1 W	1887 lm	500 mA	Asymmetric	Ø125 × 90 mm	Ø114 mm	Fixed
	**Delterra WW**	13.8 W	1167 lm	500 mA	Asymmetric	Ø91 × 70 mm	Ø83 mm	Fixed
	**Delterra Mini WW**	9.2 W	890 lm	300 mA	Asymmetric	Ø64 × 59 mm	Ø57 mm	Fixed

DELTERRA Recessed downlight

VERSIONS 13-16 OF 17

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	CUT-OUT	ADJUSTMENT
		**Delterra Mini WW Hide**	9.2 W	890 lm	300 mA	Asymmetric	Ø64 × 59 mm	Ø76 mm	Fixed
		**Delterra WW Hide**	13.8 W	1167 lm	500 mA	Asymmetric	Ø91 × 70 mm	–	Fixed
		**Delterra Midi WW Hide**	18.1 W	1887 lm	500 mA	Asymmetric	Ø125 × 90 mm	Ø133 mm	Fixed
		**Delterra OK G2**	8.9 W / 12.9 W	976–1173 lm / 1208–1439 lm	500 mA / 350 mA	20° / 28° / 38°	Ø92 × 73 / 103 mm	Ø83 mm	Tilt 0–20°, rotation 360°

DELTERRA Recessed downlight

VERSIONS 17-17 OF 17

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	CUT-OUT	ADJUSTMENT
		**Delterra OK G2 Hide**	8.9 W / 12.9 W	976–1173 lm / 1208–1439 lm	500 mA / 350 mA	20° / 28° / 38°	Ø84 × 73 / 103 mm	Ø114 mm	Tilt 0–20°, rotation 360°

LAVIS

Recessed wall washer

VERSIONS	POWER	FLUX
1	12 W	1356 lm

ADJUSTMENT	Fixed
CCT	3000 K, 1800–3000 K DTW
CRI	80 / 90
IP	IP20
DIMMING	TRIAC



CODE	**Lavis Wall Wash**
POWER	12 W
FLUX	1356–1656 lm / 36–1256 lm
CURRENT	500 mA / 350 mA
BEAM ANGLE	Asymmetric
CUT-OUT	Ø98 mm

Product page and enquiries
labos.com.tr/products/downlight/lavis/



02

TRACK SPOTS

Purelux	081	Bavero	089	Magnor	099
Luma	082	Konex	090	Azure	100
Cylite	083	Tenoris	091	Sferra	101
Axis	084	Terra	092	Pivora	102
Glow	085	Celis	093	Stylon	103
Voltis	086	Hydros	094	Elan	104
Lumis	087	Auris	095	Focara	105
Yasmira	088	Cosvex	098	Rondo	106

24 FAMILIES

Above: Rixos Premium Göcek, Fethiye

PURELUX

Track light

Continuous wall washing for feature walls.

VERSIONS



2

POWER	50 W
FLUX (3000 K)	4275 lm
CURRENT	1250 mA
CCT	2700 / 3000 / 3500 / 4000 K
CRI	90
IP	IP20
DIMMING	TRIAC / DALI / 0-10V







CODE	33.10011	33.20011
DRAWING		
BEAM ANGLE	Wall wash, tilted 20°, beam 55° × 55°	Wall wash, tilted 20°, beam 55° × 55°
DIMENSIONS	252 × 100 mm	252 × 202 mm
ADJUSTMENT	Tilt 90°, rotation 300°	Rotation 300°

Product page and enquiries
labos.com.tr/products/track/purelux/

LUMA


Track light

Reach beyond the track.

Flexible lighting for changing retail displays.




VERSIONS	POWER	FLUX
3	11–25 W	935–2963 lm

CCT	2700 / 3000 / 3500 / 4000 K
CRI	90
IP	IP20
DIMMING	TRIAC / DALI / 0-10V
ACCESSORIES	Protective glass, linear spread lens, textured glass, honeycomb louver







CODE	32.04530	32.06528	32.07326
DRAWING			
POWER	11 W	14 W	25 W
FLUX (3000 K)	935 lm	1627 lm	2963 lm
CURRENT	250 mA	350 mA	600 mA
BEAM ANGLE	19° / 29° / 44° / 56°	18° / 27° / 38° / 54°	14° / 28° / 40° / 50°
DIMENSIONS	45 × 80 mm	65 × 120 mm	73 × 125 mm
ADJUSTMENT	Multi-joint adjustable, rotation 350°	arm Multi-joint adjustable, rotation 350°	arm Multi-joint adjustable arm, rotation 350°

Product page and enquiries
labos.com.tr/products/track/luma/

CYLITE





Track light

Compact lighting for modern commercial interiors.

VERSIONS	POWER	FLUX
4	8–36 W	935–4509 lm

CCT	2700 / 3000 / 3500 / 4000 K
CRI	90
IP	IP20
DIMMING	TRIAC / DALI / 0-10V
ADJUSTMENT	Tilt 90°, rotation 350°
ACCESSORIES	Protective glass, linear spread lens, textured glass, honeycomb louver



CODE	32.04515	32.06219	32.07313	32.09013
DRAWING				
POWER	8 W	14 W	24 W	36 W
FLUX (3000 K)	935 lm	1627 lm	2963 lm	4509 lm
CURRENT	200 mA	350 mA	600 mA	900 mA
BEAM ANGLE	19° / 29° / 44° / 56°	18° / 27° / 38° / 54°	14° / 28° / 40° / 50°	16° / 20° / 30° / 45°
DIMENSIONS	45 × 100 mm	62 × 130 mm	73 × 148 mm	90 × 160 mm

Product page and enquiries
labos.com.tr/products/track/cylite-track/

AXIS

Track light

Change the front. Change the light.

Compact accent lighting for refined retail, gallery and display spaces.



VERSIONS	POWER	FLUX
2	20–27 W	2300–3404 lm

CCT	2700 / 3000 / 3500 / 4000 K
CRI	90
IP	IP20
DIMMING	TRIAC / DALI / 0-10V
ADJUSTMENT	Tilt 90°, rotation 350°
ACCESSORIES	Protective glass, linear spread lens, textured glass, honeycomb louver







CODE	32.10112	32.11911
DRAWING		
POWER	20 W	27 W
FLUX (3000 K)	2300 lm	3404 lm
CURRENT	500 mA	700 mA
BEAM ANGLE	9° / 15° / 26° / 41° / 60°	8° / 15° / 24° / 43° / 54°
DIMENSIONS	101 × 43 mm	119 × 48 mm

Product page and enquiries
labos.com.tr/products/track/axis/

GLOW

Track light

One family. More ways to shape light. Metal, made expressive.





Flexible accent lighting for different spaces and displays.

VERSIONS	POWER	FLUX
4	8–37 W	655–4573 lm

CCT	2700 / 3000 / 3500 / 4000 K
CRI	90
IP	IP20
DIMMING	TRIAC / DALI / 0-10V
ADJUSTMENT	Tilt 90°, rotation 350°
ACCESSORIES	Protective glass, linear spread lens, textured glass, honeycomb louver





CODE	32.04526	32.05522	32.06519	32.09017
DRAWING				
POWER	8 W	15 W	20 W	37 W
FLUX (3000 K)	655 lm	1244 lm	2388 lm	4573 lm
CURRENT	180 mA	350 mA	500 mA	900 mA
BEAM ANGLE	20° / 25° / 39° / 51°	17° / 28° / 39° / 49°	19° / 24° / 39° / 51°	18° / 25° / 38° / 51°
DIMENSIONS	45 × 125 mm	55 × 140 mm	65 × 160 mm	90 × 160 mm

Product page and enquiries
labos.com.tr/products/track/glow-track/

VOLTIS

Track light

Four sizes. One family.





Flexible accent lighting for retail, display and hospitality spaces.

VERSIONS	POWER	FLUX
4	8–37 W	714–4277 lm

CCT	2700 / 3000 / 3500 / 4000 K
CRI	90
IP	IP20
DIMMING	TRIAC / DALI / 0-10V
ADJUSTMENT	Tilt 90°, rotation 350°
ACCESSORIES	Protective glass, linear spread lens, textured glass, honeycomb louver





CODE	32.04538	32.05532	32.06532	32.08432
DRAWING				
POWER	8 W	15 W	20 W	37 W
FLUX (3000 K)	714 lm	1504 lm	2278 lm	4277 lm
CURRENT	200 mA	350 mA	500 mA	900 mA
BEAM ANGLE	11° / 20° / 25° / 39° / 56°	9° / 21° / 25° / 35° / 53°	8° / 18° / 25° / 34° / 57°	8° / 18° / 23° / 34° / 58°
DIMENSIONS	45 × 125 mm	55 × 140 mm	65 × 160 mm	84 × 160 mm

Product page and enquiries
labos.com.tr/products/track/voltis-track/

LUMIS

Track light

Precision wall washing for art and feature surfaces.




VERSIONS	POWER	FLUX
3	9–28 W	400–1754 lm

CCT	2700 / 3000 / 3500 / 4000 K
CRI	90
IP	IP20
DIMMING	TRIAC / DALI / 0-10V
ADJUSTMENT	Tilt 90°, rotation 350°







CODE	32.05529	32.07330	32.09020
DRAWING			
POWER	9 W	15 W	28 W
FLUX (3000 K)	400 lm	1123 lm	1754 lm
CURRENT	200 mA	350 mA	700 mA
BEAM ANGLE	Wall wash, tilted 20°, beam 48°	Wall wash, tilted 20°, beam 72°	Wall wash, tilted 22°, beam 52°
DIMENSIONS	55 × 120 mm	73 × 140 mm	90 × 160 mm

Product page and enquiries
labos.com.tr/products/track/lumis-track/


YASMIRA

Track spotlight

VERSIONS	POWER	FLUX
3	16–40 W	1248–3200 lm

CCT	3000 / 4000 / 5000 K
CRI	≥90
DIMMING	On request
FINISH	White, Black
LIGHT OPTIONS	Single CCT, dim-to-warm, tunable white
UGR	<16



CODE	U-T232-C0B3	U-T232-C0B4	U-T232-C0B5
DRAWING	 U-T232-C0B5		
POWER	16 W	30 W	40 W
FLUX	1248 / 1312 / 1344 lm	2370 / 2520 / 2460 lm	3200 / 3400 / 3440 lm
EFFICACY	78-84 lm/W	79-84 lm/W	80-86 lm/W
CURRENT	400 mA	750 mA	1000 mA
BEAM ANGLE	15° / 20° / 32° / 45° / 60°	15° / 20° / 35° / 50° / 65°	15° / 20° / 32° / 50° / 65°

Product page and enquiries
labos.com.tr/products/track/yasmira/

BAVERO


Track spotlight

VERSIONS	POWER	FLUX
3	7–24 W	770–2760 lm

CCT	3000 / 4000 / 5000 K
CRI	≥90
DIMMING	On request
FINISH	White, Black
LIGHT OPTIONS	Single CCT, dim-to-warm, tunable white





CODE	U-T419-COB3	U-T419-COB4	U-T419-COB5
DRAWING	 U-T419-COB5		
POWER	7 W	12 W	24 W
FLUX	770 / 805 / 812 lm	1440 / 1500 / 1524 lm	2760 / 2880 / 2928 lm
EFFICACY	110-116 lm/W	120-127 lm/W	120-122 lm/W
CURRENT	150 mA	300 mA	600 mA
BEAM ANGLE	12° / 20° / 30° / 55°	12° / 20° / 32° / 55°	18° / 25° / 36° / 55°
HEIGHT	116 mm	122 mm	126 mm

Product page and enquiries
labos.com.tr/products/track/bavero/

KONEX

Track spotlight

VERSIONS	POWER	FLUX
3	7–15 W	560–1230 lm

BEAM ANGLE	15° / 24° / 36° / 50°
CCT	3000 / 4000 / 5000 K
CRI	≥90
DIMMING	On request
FINISH	White, Black, Gold
LIGHT OPTIONS	Single CCT, dim-to-warm, tunable white



CODE	U-T559-C0B-D	U-T559-C0B1-D	U-T559-C0B2-D
DRAWING	U-T559-C0B1-D		
POWER	7 W	10 W	15 W
FLUX	560 / 588 / 595 lm	800 / 840 / 850 lm	1230 / 1290 / 1320 lm
EFFICACY	80-85 lm/W	80-85 lm/W	86-88 lm/W
CURRENT	150 mA	250 mA	350 mA
HEIGHT	144 mm	144 mm	154 mm

Product page and enquiries
labos.com.tr/products/track/konex/

TENORIS

Track spotlight

VERSIONS

2


POWER	7 W
FLUX	472 / 495 / 512 lm
EFFICACY	70-76 lm/W
CURRENT	180 mA
BEAM ANGLE	20° / 30° / 40°
CCT	3000 / 4000 / 5000 K
CRI	≥90
DIMMING	On request
FINISH	White, Black, Gold, Nickel

LIGHT OPTIONS





CODE	U-C1068-COB1	U-D1068-COB1
DRAWING		



U-D1068-COB1

U-D1068-COB1

Product page and enquiries
labos.com.tr/products/track/tenoris/

labos


TERRA

Track spotlight

VERSIONS	POWER	FLUX
3	16–40 W	1248–3200 lm

CCT	3000 / 4000 / 5000 K
CRI	≥90
DIMMING	On request
FINISH	White, Black
LIGHT OPTIONS	Single CCT, dim-to-warm, tunable white
UGR	<16



CODE	U-T239-C0B3	U-T239-C0B4	U-T239-C0B5
DRAWING	 U-T239-C0B5		
POWER	16 W	30 W	40 W
FLUX	1248 / 1312 / 1344 lm	2370 / 2520 / 2460 lm	3200 / 3400 / 3440 lm
EFFICACY	82-84 lm/W	79-84 lm/W	80-86 lm/W
CURRENT	450 mA	750 mA	1000 mA
BEAM ANGLE	15° / 20° / 32° / 45° / 60°	15° / 20° / 35° / 50° / 65°	15° / 20° / 32° / 50° / 65°
HEIGHT	195 mm	210 mm	232 mm

Product page and enquiries
labos.com.tr/products/track/terra/

CELIS

Track spotlight

VERSIONS	POWER	FLUX
1	9 W	1041 lm

ADJUSTMENT	Tilt 0–45°, rotation 350°
CCT	3000 K, 1800–3000 K DTW
CRI	97
IP	IP20
DIMMING	TRIAC
VOLTAGE	220–240 V



CODE	**Celis T**
DRAWING	
POWER	9 W
FLUX	1041 lm
CURRENT	500 mA
BEAM ANGLE	24° / 36° / 48°
DIMENSIONS	Ø85 × 145 mm

Product page and enquiries
labos.com.tr/products/track/celis-track/


HYDROS

Track spotlight

VERSIONS	POWER	FLUX
1	12.2 W	1356 lm

ADJUSTMENT	Tilt 90°, rotation 350°
CCT	3000 K, 1800–3000 K DTW
CRI	80 / 90
IP	IP20
DIMMING	TRIAC / DALI
VOLTAGE	220–240 V



CODE	Hydros T G2
DRAWING	

POWER	12.2 W
FLUX	1356–1656 lm
CURRENT	350 mA
BEAM ANGLE	25° / 36° / 52°
DIMENSIONS	Ø120 × 104 mm

Product page and enquiries
labos.com.tr/products/track/hydros-track/

AURIS

Track spotlight

VERSIONS	POWER	FLUX
8	4.5–28.4 W	790–3341 lm

ADJUSTMENT	Tilt 90°, rotation 350°
CCT	3000 K, 1800–3000 K DTW
CRI	80 / 90
IP	IP20
DIMMING	On/off / TRIAC / DALI
VOLTAGE	220–240 V / 100–240 V



8 CONFIGURATIONS



Auris Air T

1 VERSION, P. 096



Auris Medi Air T

1 VERSION, P. 096



Auris Mini Air LT

1 VERSION, P. 096




Auris Mini Air T-9W / Auris DIM / Auris

1 VERSION, P. 096



Auris S BI T

1 VERSION, P. 097




Auris S BI T1

1 VERSION, P. 097



Auris Slim Air T

1 VERSION, P. 097







Auris Mini Air T-GU10

1 VERSION, P. 097

Product page and enquiries
labos.com.tr/products/track/auris-track/





AURIS Track spotlight

VERSIONS 1-4 OF 8

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS
		**Auris Air T**	28.4 W	3341–3835 lm	800 mA	18° / 32° / 50°	Ø87 × 220 mm
		**Auris Medi Air T**	18.1 W	1887–2296 lm	500 mA	15° / 30° / 44° / 60°	Ø76 × 224 mm
		**Auris Mini Air LT**	12.2 W	1356–1656 lm / 26–1265 lm	350 mA	25° / 36° / 50°	Ø60 × 193 mm
		**Auris Mini Air T-9W / Auris DIM / Auris**	8.9 W / 12.2 W	976–1173 lm / 1356–1656 lm	500 mA / 350 mA	24° / 34° / 48°	Ø60 × 168 mm

AURIS Track spotlight

VERSIONS 5-8 OF 8

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS
		**Auris S BI T**	18.1–38.3 W	1887–5093 lm	500–1050 mA	15–60°	Ø60 × 203 / Ø76 × 229 / Ø87 × 226 / Ø87 × 252 mm
		**Auris S BI T1**	7–12.9 W	790–1439 lm	200–350 mA	14–49°	Ø40 × 134 / Ø40 × 169 / Ø60 × 125 mm
		**Auris Slim Air T**	4.5 W	–	–	–	Ø42 × 173 mm
		**Auris Mini Air T-GU10**	7.5 W	–	–	–	Ø60 × 133 mm

COSVEX

Track spotlight






VERSIONS
5

POWER
2–22.1 W

FLUX
2–2637 lm

ADJUSTMENT	Tilt 0–90°, rotation 350°
CCT	2700 / 3000 K
CRI	90
IP	IP20
DIMMING	On/off / DALI
VOLTAGE	220–240 V



CODE	Cosvex S42L BI T IT	Cosvex S42Lx2 BI T IT	Cosvex S60 BI T IT	Cosvex S76 BI T IT	Cosvex S87 BI T IT
DRAWING					
POWER	12.2 W	2×12.2 W	12.2 W	18.1 W	22.1 W
FLUX	1321 lm / 1370 lm	2×1321 lm / 2×1370 lm	1321 lm / 1370 lm	1820 lm / 1887 lm	2637 lm / 2757 lm
CURRENT	350 mA	350 mA	350 mA	500 mA	650 mA
BEAM ANGLE	25° / 34° / 48°	25° / 34° / 48°	25° / 36° / 50°	15° / 30° / 44° / 60°	15° / 24° / 40° / 60°
DIMENSIONS	Ø42 × 189 mm	396 × 190 mm, heads Ø42	Ø60 × 159 mm	Ø76 × 210 mm	Ø87 × 144 mm

Product page and enquiries
labos.com.tr/products/track/cosvex/

MAGNOR

Track spotlight

VERSIONS	POWER	FLUX
2	23–37 W	3635–5469 lm

ADJUSTMENT	Tilt 0–90°, rotation 350°
CCT	3000 K
CRI	90
IP	IP20
DIMMING	On/off / DALI
VOLTAGE	220–240 V AC





CODE	Magnor S87 BI T	Magnor S102 BI T
DRAWING		
POWER	23 W	37 W
FLUX	3635 lm	5469 lm
CURRENT	650 mA	1050 mA
BEAM ANGLE	15° / 24° / 40° / 60°	15° / 24° / 36° / 60°
DIMENSIONS	Ø87 × 164 mm	Ø102 × 190 mm

Product page and enquiries
labos.com.tr/products/track/magnor/

AZURE

Track spotlight



VERSIONS	POWER	FLUX
3	7.5–12.2 W	1321 lm

CCT	2700 / 3000 K, 1800–3000 K DTW
CRI	90
IP	IP20
DIMMING	TRIAC
VOLTAGE	220–240 V AC / 220–240 V







CODE	Azure Plus T	Azure K T	Azure T
DRAWING			
POWER	12.2 W / 11.8 W	7.5 W	7.5 W
FLUX	1321 lm / 1370 lm / 36–1265 lm	–	–
CURRENT	350 mA	–	–
BEAM ANGLE	17° / 25° / 37° / 50°	–	–
DIMENSIONS	Ø82 × 150 mm	Ø65 × 111 mm	Ø65 × 150 mm
ADJUSTMENT	Tilt 0–75°, rotation 350°	Tilt 90°, rotation 350°	Tilt 90°, rotation 350°

Product page and enquiries
labos.com.tr/products/track/azure-track/

SFERRA



Track spotlight

VERSIONS	POWER	FLUX
2	8.8–8.9 W	976 lm

CCT	3000 / 4000 K, 1800–3000 K DTW
CRI	80 / 90
IP	IP20
DIMMING	On/off / TRIAC
VOLTAGE	220–240 V / 100–240 V





CODE	Sferra 75SL BI T	Sferra T
DRAWING		
POWER	8.8 W / 11.8 W	8.9 / 12.2 W
FLUX	976–1032 lm / 36–1265 lm	976–1656 lm
CURRENT	250 mA / 350 mA	500 mA / 350 mA
BEAM ANGLE	15° / 24° / 36° / 50°	24° / 34° / 48°
DIMENSIONS	Ø75 × 135 mm	Ø102 × 140 mm
ADJUSTMENT	Tilt 0–90°, rotation 350°	Tilt 45°, rotation 350°

Product page and enquiries
labos.com.tr/products/track/sferra-track/

PIVORA

Track spotlight

VERSIONS	POWER	FLUX
4	9–18.1 W	1000–1887 lm





CCT	2700 / 3000 K, 1800–3000 K DTW
CRI	80 / 90 / 97
IP	IP20
DIMMING	TRIAC / DALI / On/off
VOLTAGE	220–240 V









CODE	Pivora Tilt T	Pivora Tilt Mini T	Pivora Plus BI T	Pivora G2 T
DRAWING				
POWER	14 W	9 W	18.1 W	13.8 / 18.1 W
FLUX	1356 lm / 1428 lm	1000 lm / 1046 lm / 1041 lm	1887–2296 lm	1167–2296 lm
CURRENT	500 mA	500 mA	500 mA	500 mA
BEAM ANGLE	25° / 35° / 52° reflector, 18° lens	24° / 34° / 46°	25° / 36° / 50°	21° / 33° / 48°
DIMENSIONS	Ø102 × 133 mm	Ø84 × 126 mm	Ø100 × 135 mm	Ø100 × 103 / 122 mm
ADJUSTMENT	Rotation 350°, tilt 75°	Rotation 350°, tilt 65°	Tilt 90°, rotation 350°	Tilt 90°, rotation 350°

Product page and enquiries
labos.com.tr/products/track/pivora-track/

STYLON

Track spotlight

VERSIONS	POWER	FLUX
1	9 W	873 lm

ADJUSTMENT	Tilt 0–60°, rotation 350°
CCT	3000 K
CRI	80 / 90
IP	IP20
DIMMING	TRIAC
VOLTAGE	220–240 V



CODE	Stylon T
POWER	9 W
FLUX	873 lm / 1040 lm
CURRENT	250 mA
BEAM ANGLE	24° / 36° / 50°

Product page and enquiries
labos.com.tr/products/track/stylon-track/

ELAN



Track spotlight

VERSIONS	POWER	FLUX
2	9 W	976 lm

ADJUSTMENT	Rotation 350°, tilt 90°
CCT	3000 K, 2000–3000 K DTW
CRI	80 / 90
IP	IP20
DIMMING	TRIAC / DALI
VOLTAGE	100–240 V, 220–240 V





CODE	Elan	Elan Erect
DRAWING		
POWER	9 / 12 / 18 / 28 W	9 / 12 / 18 / 28 W
FLUX	976–3341 lm	976–3341 lm
CURRENT	350–800 mA by model	350–800 mA by model
BEAM ANGLE	9 W 24° / 34° / 48°	9 W 24° / 34° / 48°
DIMENSIONS	Mini Ø60 × 139 mm	Mini Ø60 × 151 mm

Product page and enquiries
labos.com.tr/products/track/elan/


FOCARA

Track spotlight

VERSIONS	POWER	FLUX
1	13 W	446 lm

ADJUSTMENT	Tilt 90°, rotation 350°
CCT	3000 K
CRI	80 / 90
IP	IP20
DIMMING	TRIAC
VOLTAGE	220–240 V AC



CODE	Focara Focus-T
DRAWING	
POWER	13 W
FLUX	446–606 lm
CURRENT	350 mA
BEAM ANGLE	10–48°
DIMENSIONS	Ø62 × 195 mm

Product page and enquiries
labos.com.tr/products/track/focara/

RONDO

Track spotlight

VERSIONS	POWER
1	7.5 W

ADJUSTMENT	Tilt 90°, rotation 350°
IP	IP20
VOLTAGE	220–240 V



CODE	Rondo T
DRAWING	
POWER	7.5 W
DIMENSIONS	Ø60 × 156 mm

Product page and enquiries
labos.com.tr/products/track/rondo-track/



03

MAGNETIC AND SLIM TRACK SYSTEMS

13 FAMILIES

Above: Türkiye Finans Bank HQ, Istanbul

Cylite	108
Opton	109
Glow	110
Voltis	111
Nano	112
Orient	113
Flovira	114
Foltrix	115
Foltrix Flat	116
Lastrim	117
Nova	118
MonoVolt	119
Trackon	120

CYLITE

Low voltage track light

Comfortable accent lighting for retail, display and reading environments where visual comfort matters.




VERSIONS	POWER	FLUX
3	11–24 W	935–2963 lm

CCT	2700 / 3000 / 3500 / 4000 K
CRI	90
IP	IP20
DIMMING	DALI / 0-10V
ADJUSTMENT	Tilt 90°, rotation 350°
ACCESSORIES	Protective glass, linear spread lens, textured glass, honeycomb louver







CODE	62.04512	62.06217	62.07312
DRAWING			
POWER	11 W	14 W	24 W
FLUX (3000 K)	935 lm	1627 lm	2963 lm
CURRENT	250 mA	350 mA	600 mA
BEAM ANGLE	19° / 29° / 44° / 56°	18° / 27° / 38° / 54°	14° / 28° / 40° / 50°
DIMENSIONS	45 × 100 mm	62 × 130 mm	73 × 148 mm

Product page and enquiries
labos.com.tr/products/magnetic/cylite-magnetic/

OPTON

Magnetic framing spotlight



Precision framing light for museums, galleries and exhibition spaces where accurate aiming and controlled illumination are required.

VERSIONS	POWER	FLUX
2	6–8 W	140–267 lm

CCT	2700 / 3000 / 3500 / 4000 K
CRI	90
IP	IP20
DIMMING	DALI / 0-10V
ADJUSTMENT	Tilt 90°, rotation 350°
ACCESSORIES	Protective glass, linear spread lens, textured glass, honeycomb louver





CODE	62.02812	62.03811
DRAWING		
POWER	6 W	8 W
FLUX (3000 K)	140 lm	267 lm
CURRENT	150 mA	200 mA
BEAM ANGLE	16°-33°	21°-31°
DIMENSIONS	28 × 122 mm	38 × 135 mm

Product page and enquiries
labos.com.tr/products/magnetic/opton/

GLOW


Low voltage track light

Flexible accent lighting for retail, residential and hospitality spaces where compact scale and precise aiming matter.

VERSIONS	POWER	FLUX
4	4–25 W	197–2615 lm

CCT	2700 / 3000 / 3500 / 4000 K
CRI	90
IP	IP20
DIMMING	DALI / 0-10V
ADJUSTMENT	Tilt 90°, rotation 350°
ACCESSORIES	Protective glass, linear spread lens, textured glass, honeycomb louver



CODE	62.02513	62.03517	62.04531	62.05518
DRAWING				
POWER	4 W	9 W	15 W	25 W
FLUX (3000 K)	197 lm	612 lm	1083 lm	2615 lm
CURRENT	80 mA	200 mA	350 mA	600 mA
BEAM ANGLE	17° / 26° / 31° / 53°	16° / 23° / 38° / 49°	19° / 24° / 36° / 43°	20° / 31° / 43° / 52°
DIMENSIONS	25 × 60 mm	35 × 90 mm	45 × 125 mm	55 × 140 mm

Product page and enquiries
labos.com.tr/products/magnetic/glow-magnetic/

VOLTIS

Low voltage track light

Flexible accent lighting for retail, residential and hospitality spaces where compact scale and precise aiming matter.






VERSIONS
5

POWER
4–25 W

FLUX
197–2675 lm

CCT	2700 / 3000 / 3500 / 4000 K
CRI	90
IP	IP20
DIMMING	DALI / 0-10V
ADJUSTMENT	Tilt 90°, rotation 350°



CODE	62.02516	62.03520	62.04540	62.05526	62.06511
DRAWING					
POWER	4 W	9 W	15 W	20 W	25 W
FLUX (3000 K)	197 lm	612 lm	1155 lm	2073 lm	2675 lm
CURRENT	80 mA	200 mA	350 mA	500 mA	600 mA
BEAM ANGLE	17° / 26° / 31° / 53°	16° / 23° / 38° / 49°	19° / 24° / 39° / 56°	21° / 26° / 35° / 53°	18° / 25° / 34° / 56°
DIMENSIONS	25 × 60 mm	35 × 90 mm	45 × 125 mm	55 × 140 mm	65 × 160 mm

Product page and enquiries
labos.com.tr/products/magnetic/voltis-magnetic/


NANO

Magnetic track luminaire, 20 mm system

VERSIONS	POWER	FLUX
1	3 W	828 lm

CCT	3000 / 4000 / 5000 K
CRI	≥90
DIMMING	On request
FINISH	White, Black
LIGHT OPTIONS	
UGR	<12



CODE	U-M473-SMD4
DRAWING	

U-M473-SMD4

POWER	3 W
FLUX	828 / 876 / 900 lm
EFFICACY	69-75 lm/W
CURRENT	250 mA
BEAM ANGLE	25° / 38°

Product page and enquiries
labos.com.tr/products/magnetic/nano/

ORIENT

Magnetic track luminaire, 20 mm system

VERSIONS	POWER	FLUX
1	12 W	960 lm

CCT	3000 / 4000 / 5000 K
CRI	≥90
DIMMING	On request
FINISH	
UGR	<19



CODE	U-M651-SMD12
POWER	12 W
FLUX	960 / 1020 / 1032 lm
EFFICACY	85-86 lm/W
CURRENT	300 mA
BEAM ANGLE	28°x36° / Asymmetric

Product page and enquiries
labos.com.tr/products/magnetic/orient/

FLOVIRA

Magnetic track luminaire, 20 mm system

VERSIONS	POWER	FLUX
4	35–88 W	2100–5368 lm

BEAM ANGLE	360°
CCT	3000 / 4000 / 5000 K
CRI	≥90
DIMMING	On request
FINISH	White, Black
LIGHT OPTIONS	Single CCT, dim-to-warm, tunable white
UGR	<21



CODE	U-M812-SMD250	U-M812-SMD500	U-M811-SMD250	U-M811-SMD500
POWER	35 W	57 W	42 W	88 W
FLUX	2100 / 2310 / 2345 lm	3306 / 3591 / 3705 lm	2604 / 2856 / 2940 lm	5368 / 5896 / 5808 lm
EFFICACY	60-67 lm/W	58-65 lm/W	62-70 lm/W	61-67 lm/W
CURRENT	750 mA	1200 mA	900 mA	1800 mA

Product page and enquiries
labos.com.tr/products/magnetic/flovira/



FOLTRIX

Magnetic track luminaire, 20 mm system

VERSIONS	FLUX
2	792–1092 lm

POWER	12 W
CURRENT	320 mA
HEIGHT	100 mm
CCT	3000 / 4000 / 5000 K
CRI	≥90
DIMMING	On request
FINISH	White, Black
LIGHT OPTIONS	Single CCT, dim-to-warm, tunable white
UGR	<16

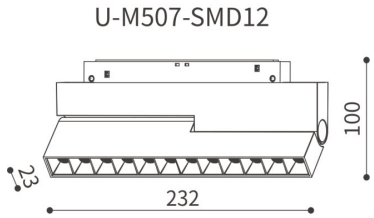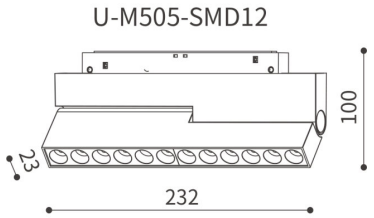

CODE	U-M507-SMD12	U-M505-SMD12
DRAWING		
FLUX	792 / 840 / 852 lm	1092m / 1116 / 1152 lm
EFFICACY	66-71 lm/W	79-84 lm/W
BEAM ANGLE	25° / 38°	25° / 30°

Product page and enquiries
labos.com.tr/products/magnetic/foltrix/

FOLTRIX FLAT


Magnetic track luminaire, 20 mm system

VERSIONS	POWER	FLUX
1	12 W	708 lm

CCT	3000 / 4000 / 5000 K
CRI	≥90
DIMMING	On request
FINISH	White, Black
UGR	<21



CODE	U-M505-SMD12PC
DRAWING	U-M505-SMD12PC

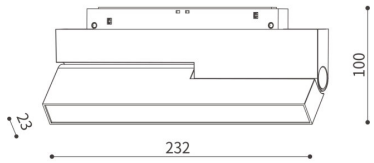

POWER	12 W
FLUX	708 / 732 / 780 lm
EFFICACY	59-65 lm/W
CURRENT	320 mA
BEAM ANGLE	80°
HEIGHT	100 mm

Product page and enquiries
labos.com.tr/products/magnetic/foltrix-flat/

LASTRIM


Magnetic track luminaire, 20 mm system

VERSIONS	FLUX
2	1088–1248 lm

POWER	16 W
CURRENT	430 mA
CCT	3000 / 4000 / 5000 K
CRI	≥90
DIMMING	On request
FINISH	White, Black
LIGHT OPTIONS	Single CCT, dim-to-warm, tunable white
UGR	<16





	U-D355-24	U-D355-24PC
CODE	U-D355-24	U-D355-24PC
DRAWING		
FLUX	1088 / 1152 / 1168 lm	1248 / 1328 / 1312 lm
EFFICACY	68-73 lm/W	78-83 lm/W
BEAM ANGLE	25° / 38°	100°
DIMENSIONS	464 × 23 mm	–
HEIGHT	43 mm	4 mm

Product page and enquiries
labos.com.tr/products/magnetic/lastrim/

NOVA

Track luminaire, 11 mm system

VERSIONS

1

CCT	K



CODE	U-N003-09

Product page and enquiries
labos.com.tr/products/magnetic/nova/

MONOVOLT

Mini track luminaire, 5 mm system

VERSIONS	POWER	FLUX
2	5 W	200 lm

UGR	<16





CODE	U-Z010-SMD28	U-Z011-SMD28
POWER	5 W	–
FLUX	200 / 210 / 220 lm	Flux / 300 / 315 / 320 lm
EFFICACY	40-42 lm/W	60-63 lm/W
CURRENT	120 mA	–
BEAM ANGLE	100°	Beam Angle
CCT	3000 / 4000 / 5000 K	CCT / 3000 / 4000 / 5000 K
CRI	≥90	CRI


Product page and enquiries
labos.com.tr/products/magnetic/monovolt/

TRACKON

Magnetic track system, 48 V

VERSIONS	POWER	FLUX
72	2–25.2 W	2–3081 lm

CCT	2700 / 3000 / 4000 K
CRI	80 / 90
IP	IP20
DIMMING	DALI / 0–10 V / On/off / 1–10 V
VOLTAGE	48 V DC

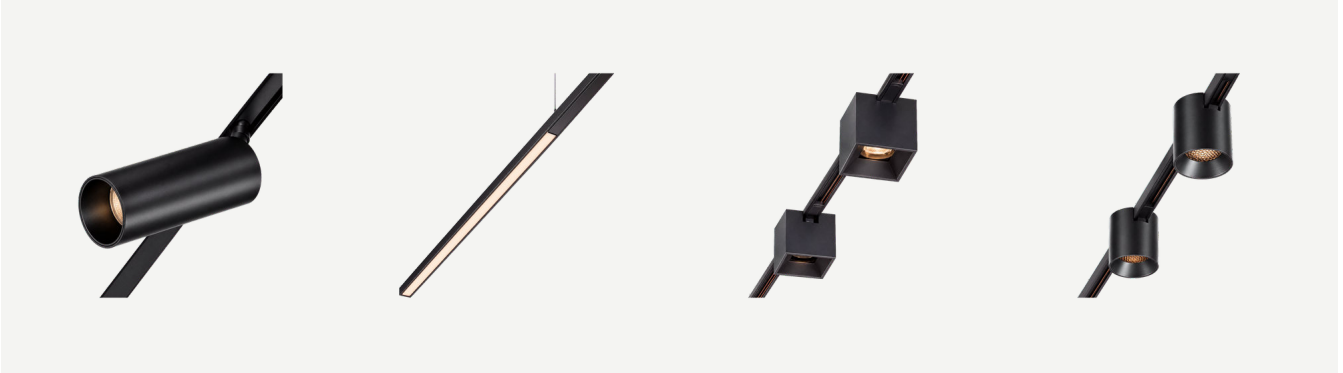

72 VERSIONS



Trackon Micro S40-Trackon Micro T30

5 VERSIONS, P. 121



Trackon Micro-Trackon Micro S30x2

5 VERSIONS, P. 122



Trackon Micro S40L-Trackon Micro Ambient S-10W

5 VERSIONS, P. 123



Trackon Micro Ambient S-20W-Trackon Micro SQ-A

5 VERSIONS, P. 124



Trackon Micro SQ-B-Trackon Micro R-C

5 VERSIONS, P. 125



Trackon S26-Trackon S40L

5 VERSIONS, P. 126



Trackon S40Lx2-Trackon S75 Plus

5 VERSIONS, P. 127



Trackon S100 Plus-Trackon Wall Wash23-11W

5 VERSIONS, P. 128



Trackon Wall Wash23-21W-Trackon CMA 5 Air

5 VERSIONS, P. 129



Trackon CMA 10 Air-Trackon T128 Tilt

5 VERSIONS, P. 130



Trackon A178 Air-Trackon A100

5 VERSIONS, P. 131



Trackon T100 G2-Trackon T26

5 VERSIONS, P. 132



Trackon T40-Trackon Ambient Move-16W

5 VERSIONS, P. 133



Trackon Ambient Move-24W-Trackon Ambient S G2-18W

5 VERSIONS, P. 134



Trackon Rise SQ-Trackon Rise R

2 VERSIONS, P. 135

Product page and enquiries
labos.com.tr/products/magnetic/trackon/

TRACKON

Magnetic track system, 48 V



VERSIONS 1-5 OF 72

	CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	UGR	ADJUSTMENT
	**Trackon Micro S40**	10.8 W	–	–	15° / 34°	Ø40 × 105 mm	–	–
	**Trackon Micro Ambient**	10 W / 20 W	–	–	–	685 × 11 × 12 / 1178 × 11 × 20 mm	–	–
	**Trackon Micro Rise SQ**	10.8 W	–	–	24° / 36°	67 × 67 × 66 mm	–	–
	**Trackon Micro Rise R**	10.8 W	–	–	24° / 36°	Ø67 × 66 mm	–	–
	**Trackon Micro T30**	6.4 W	–	–	24° / 36°	Ø30 × 400 mm	–	–

TRACKON

Magnetic track system, 48 V



VERSIONS 6-10 OF 72

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	UGR	ADJUSTMENT
		**Trackon Micro**	–	–	–	–	–	–	–
		**Trackon Micro S22**	2 W	149–154 lm	700 mA	17° / 28°	Ø22 × 66 mm	–	Rotation 350°, tilt 90°
		**Trackon Micro S22x2**	2×2 W	2×194 lm / 2×182 lm	700 mA	17° / 28°	Ø22 × 66 mm, 171 mm long	–	Rotation 350°, tilt 90°
		**Trackon Micro S30**	6 W	496–543 lm	350 mA	20° / 39°	Ø30 × 97 mm	–	Rotation 350°, tilt 90°
		**Trackon Micro S30x2**	2×6 W	2×634 lm / 2×607 lm	350 mA	20° / 39°	Ø30 × 97 mm, 181 mm long	–	Rotation 350°, tilt 90°

TRACKON

Magnetic track system, 48 V




VERSIONS 11-15 OF 72

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	UGR	ADJUSTMENT
		**Trackon Micro S40L**	10.8 W	917–1017 lm	300 mA	20° / 33°	Ø40 × 126 mm	–	Rotation 350°, tilt 90°
		**Trackon Micro S40Lx2**	2×10.8 W	2×1142 lm / 2×1093 lm	300 mA	20° / 33°	Ø40 × 126 mm, 181 mm long	–	Rotation 350°, tilt 90°
		**Trackon Micro CM6**	7 W	744 lm / 696 lm	400 mA	33° / 46°	289 × 20 × 11 mm	–	Fixed
		**Trackon Micro CM12**	14 W	1488 lm / 1392 lm	400 mA	32° / 46°	398 × 20 × 11 mm	<5 / <11	Fixed
		**Trackon Micro Ambient S-10W**	10 W	819 lm	500 mA	114°	685 × 12 × 11 mm	–	–

TRACKON

Magnetic track system, 48 V




VERSIONS 16-20 OF 72

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	UGR	ADJUSTMENT
		**Trackon Micro Ambient S-20W**	20 W	1795 lm	500 mA	124°	1178 × 12 × 11 mm	–	–
		**Trackon Micro Rise R-B**	6 W	1142 lm / 1093 lm	300 mA	25° / 38° / 47°	162 × Ø67 × 66 mm	–	Fixed
		**Trackon Micro Rise SQ-B**	6 W	1142 lm / 1093 lm	300 mA	25° / 36° / 48°	162 × 67 × 67 × 66 mm	–	Fixed
		**Trackon Micro Rise LS**	–	–	–	–	Ø62 × 49 mm, length 162 mm	–	–
		**Trackon Micro SQ-A**	–	–	–	–	–	–	–

TRACKON

Magnetic track system, 48 V






VERSIONS 21-25 OF 72

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	UGR	ADJUSTMENT
		Trackon Micro SQ-B	–	–	–	–	–	–	–
		Trackon Micro SQ-C	–	–	–	–	67 × 67 × 73 mm	–	–
		Trackon Micro R-A	–	–	–	–	Ø67 × 51 mm	–	–
		Trackon Micro R-B	–	–	–	–	–	–	–
		Trackon Micro R-C	–	–	–	–	–	–	–

TRACKON






Magnetic track system, 48 V

VERSIONS 26-30 OF 72

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	UGR	ADJUSTMENT
		Trackon S26	2 W	174–190 lm	700 mA	12° / 17° / 23°	167 × 92 mm	–	Tilt 90°, rotation 350°
		Trackon S26x2	2×2 W	2×220 lm	700 mA	12° / 17° / 23°	167 × 92 mm	–	Tilt 90°, rotation 350°
		Trackon S40	7 W	418–442 lm	700 mA	20° / 35°	167 × 123 mm	–	Tilt 90°, rotation 350°
		Trackon S40x2	2×7 W	2×668 lm	700 mA	20° / 35°	167 × 123 mm	–	Tilt 90°, rotation 350°
		Trackon S40L	11 W	742–780 lm	350 mA	18° / 25° / 33°	167 × 158 mm	–	Tilt 90°, rotation 350°

TRACKON



Magnetic track system, 48 V

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	UGR	ADJUSTMENT
		Trackon S40Lx2	2×11 W	2×1011 lm	350 mA	18° / 25° / 33°	167 × 158 mm	–	Tilt 90°, rotation 350°
		Trackon S60	11 W	765–908 lm	350 mA	14° / 28° / 50°	Ø60 × 143 mm	<15	Tilt 90°, rotation 350°
		Trackon S60L	18 W	1185–1652 lm	500 mA	20° / 36° / 46°	Ø60 × 190 mm	<19	Tilt 90°, rotation 350°
		Trackon S62 Focus	13 W	446–607 lm	350 mA	12–46°	Ø62 × 165 mm	<3 to <8 by beam	Tilt 90°, rotation 350°
		Trackon S75 Plus	11 W	693–742 lm	350 mA	18° / 25° / 33°	Ø75 × 110 mm	–	Tilt 90°, rotation 350°

TRACKON

Magnetic track system, 48 V





VERSIONS 36-40 OF 72

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	UGR	ADJUSTMENT
		**Trackon S100 Plus**	18 W	1229–1496 lm	500 mA	20° / 39°	Ø100 × 118 mm	–	Tilt 90°, rotation 350°
		**Trackon S75U**	11 W / 12 W	1011 lm / 1055 lm	350 mA	13° / 25° / 36° / 50°	Ø75 × 106 mm	–	Tilt 0–90°, rotation 350°
		**Trackon CM5 G2**	8 W	810 lm	500 mA	13° / 36° / 46°	175 × 22 × 43 mm	–	Fixed
		**Trackon CM10 G2**	15 W	1620 lm	500 mA	14° / 36° / 48°	266 × 22 × 43 mm	–	Fixed
		**Trackon Wall Wash23-11W**	11 W	1075 lm	700 mA	Asymmetric 32° + 46°	212 × 22 × 48 mm	–	–

TRACKON

Magnetic track system, 48 V






VERSIONS 41–45 OF 72

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	UGR	ADJUSTMENT
		**Trackon Wall Wash23-21W**	21 W	2150 lm	700 mA	Asymmetric 35° + 52°	328 × 22 × 48 mm	–	–
		**Trackon CMA Ambient**	6 W	756 lm	350 mA	110°	186 × 22 × 100 mm	–	Rotates 0–135°
		**Trackon CMA 5S**	8 W	755 lm	500 mA	13° / 36° / 46°	95 × 22 × 100 mm	–	Rotates –45° to +90°
		**Trackon CMA 10S**	15 W	1510 lm	500 mA	14° / 36° / 48°	186 × 22 × 100 mm	–	Rotates –45° to +90°
		**Trackon CMA 5 Air**	8 W	755 lm	500 mA	13° / 36° / 46°	95 × 23 × 114 mm	–	Rotation 350°, spot head adjust 90°

TRACKON

Magnetic track system, 48 V






VERSIONS 46-50 OF 72

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	UGR	ADJUSTMENT
		**Trackon CMA 10 Air**	15 W	1510 lm	500 mA	14° / 36° / 48°	186 × 23 × 114 mm	–	Rotation 360°, spot head adjust 90°
		**Trackon A128 Air**	9 W	695 lm	500 mA	173°	Ø128 × 133 mm	<25	Fixed
		**Trackon A128**	9 W	695 lm	500 mA	173°	Ø128 × 158 mm	<25	Rotation 360°, tilt 0–30°
		**Trackon T128**	9 W	695 lm	500 mA	173°	Ø128 mm, 1170 mm drop	<25	Fixed
		**Trackon T128 Tilt**	9 W	695 lm	500 mA	173°	Ø128 mm, 1170 mm drop	<25	Fixed

TRACKON

Magnetic track system, 48 V



VERSIONS 51–55 OF 72

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	UGR	ADJUSTMENT
		**Trackon A178 Air**	14 W	1159 lm	700 mA	174°	Ø178 × 178 mm	<23	Fixed
		**Trackon A178**	14 W	1159 lm	700 mA	174°	Ø178 × 206 mm	<23	Rotation 360°, tilt 0–30°
		**Trackon T178**	14 W	1159 lm	700 mA	174°	Ø178 × 1240 mm	<23	Fixed
		**Trackon T178 Tilt**	14 W	1159 lm	700 mA	174°	Ø178 × 1240 mm	<23	Fixed
		**Trackon A100**	2×6 W	1159 lm	350 mA	165° + 280°	205 × 143 mm, globes Ø100 mm	<22	–

TRACKON

Magnetic track system, 48 V





VERSIONS 56-60 OF 72

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	UGR	ADJUSTMENT
		**Trackon T100 G2**	6 W	587 lm	350 mA	265°	Ø100 mm globe, suspension 1.5 m	<26	–
		**Trackon Ambient-6W**	6.3 W	696 lm	700 mA	115°	285 × 22 × 43 mm	–	–
		**Trackon Ambient-13W**	12.6 W	1393 lm	700 mA	115°	565 × 22 × 43 mm	–	–
		**Trackon Ambient-25W**	25.2 W	2786 lm	700 mA	117°	1125 × 22 × 43 mm	–	–
		**Trackon T26**	7 W	411–448 lm	700 mA	28° / 42°	Ø26 × 400 / 600 / 800 mm	–	–

TRACKON

Magnetic track system, 48 V



VERSIONS 61-65 OF 72

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	UGR	ADJUSTMENT
		**Trackon T40**	7 W	742–761 lm	700 mA	18° / 34°	Ø40 × 250 / 400 mm	–	–
		**Trackon T40 E**	7 W	532–562 lm	700 mA	20° / 36°	Ø40 × 260 / 410 mm	<22	–
		**Trackon T2646**	7 W	742–761 lm	700 mA	18° / 34°	Ø46 × 280 mm	–	–
		**Trackon S40LL**	11 W	1011 lm / 962 lm	350 mA	18° / 25° / 33°	Ø40 × 105 mm	–	Rotation 350°, tilt 90°
		**Trackon Ambient Move-16W**	16 W	2054 lm	700 mA	134°	1125 × 26 × 72 mm	–	–

TRACKON

Magnetic track system, 48 V



VERSIONS 66-70 OF 72

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	UGR	ADJUSTMENT
		**Trackon Ambient Move-24W**	24 W	3081 lm	700 mA	–	1738 × 26 × 72 mm	–	–
		**Trackon CM5 S**	8 W	803–828 lm	500 mA	13°	339 × 22 × 16 mm	–	Fixed
		**Trackon CM10 S**	15 W	1202–1223 lm	500 mA	14°	430 × 22 × 16 mm	–	Fixed
		**Trackon Ambient S G2-9W**	9 W	399 lm	500 mA	114°	688 × 18 × 16 mm	–	–
		**Trackon Ambient S G2-18W**	18 W	520 lm	500 mA	123°	1206 × 18 × 16 mm	–	–

TRACKON

Magnetic track system, 48 V

VERSIONS 71-72 OF 72

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	UGR	ADJUSTMENT
		Trackon Rise SQ	9 W	932–978 lm	300 mA	24° / 36° / 47°	80 × 80 × 90 mm	–	Fixed
		Trackon Rise R	9 W	1116–1153 lm	300 mA	24° / 36° / 47°	Ø80 × 90 mm	–	Fixed



04

SURFACE, PENDANT AND WALL WASH

Optis	137	Orbelia S	145	Sferra	173	Vertis	186	Modulon	196
Cylite	138	Edge Classic	146	Barra	174	Pictora	187	Conica	203
Lumis	139	Edge Mini	147	Pivora	175	Perla	188	Stelo	204
Orbix Surface	140	Cirvona	148	Profond	179	Rondo	189	Vela	205
Solaris	141	Celis	149	Lumetrix	180	Giznova	192		
Linvera	142	Hydros	150	Stylon	181	Colona	193		
Lutriva	143	Auris	159	Stylon Slim	182	Quadris	194		
Orbelia L	144	Azure	168	Gradia	183	Lumina	195		

36 FAMILIES

Above: Rixos Premium Belek, Antalya

OPTIS

Surface mounted light

Adjustable surface-mounted lighting for retail, hospitality, residential and commercial interiors.




VERSIONS	POWER	FLUX
3	10–20 W	876–2471 lm

UGR	--
CCT	2700 / 3000 / 3500 / 4000 K
CRI	90
IP	IP20
DIMMING	TRIAC / DALI / 0-10V
ADJUSTMENT	Tilt 25°, rotation 350°
ACCESSORIES	Protective glass, linear spread lens, textured glass, honeycomb louver







CODE	93.06218	93.08413	93.10111
DRAWING			
POWER	10 W	15 W	20 W
FLUX (3000 K)	876 lm	1304 lm	2471 lm
CURRENT	250 mA	350 mA	500 mA
BEAM ANGLE	21° / 34° / 59°	15° / 23° / 31° / 59°	15° / 24° / 35° / 60°
DIMENSIONS	62 × 95 mm	84 × 133 mm	101 × 150 mm

Product page and enquiries
labos.com.tr/products/surface/optis/

CYLITE

Surface mounted light

Flexible surface-mounted accent lighting for retail, galleries and refined commercial interiors.

VERSIONS	POWER	FLUX
4	11–36 W	935–4509 lm





UGR	--
CCT	2700 / 3000 / 3500 / 4000 K
CRI	90
IP	IP20
DIMMING	TRIAC / DALI / 0-10V
ADJUSTMENT	Tilt 90°, rotation 350°
ACCESSORIES	Protective glass, linear spread lens, textured glass, honeycomb louver









CODE	93.04513	93.06213	93.07311	93.09011
DRAWING				
POWER	11 W	14 W	24 W	36 W
FLUX (3000 K)	935 lm	1627 lm	2963 lm	4509 lm
CURRENT	250 mA	350 mA	600 mA	900 mA
BEAM ANGLE	19° / 29° / 44° / 56°	18° / 27° / 38° / 54°	14° / 28° / 40° / 50°	16° / 20° / 30° / 45°
DIMENSIONS	45 × 100 mm	62 × 130 mm	73 × 148 mm	90 × 160 mm

Product page and enquiries
labos.com.tr/products/surface/cylite-surface/

LUMIS

Surface mounted light

Uniform wall washing for galleries, retail displays and architectural feature walls.




VERSIONS	POWER	FLUX
3	9–28 W	400–1754 lm

UGR	--
CCT	2700 / 3000 / 3500 / 4000 K
CRI	90
IP	IP20
DIMMING	TRIAC / DALI / 0-10V







CODE	91.05513	91.07313	91.09015
DRAWING			
POWER	9 W	15 W	28 W
FLUX (3000 K)	400 lm	1123 lm	1754 lm
CURRENT	200 mA	350 mA	700 mA
BEAM ANGLE	Wall wash, tilted 20°, beam 48°	Wall wash, tilted 20°, beam 72°	Wall wash, tilted 22°, beam 52°
DIMENSIONS	55 × 90 mm	73 × 105 mm	90 × 116 mm

Product page and enquiries
labos.com.tr/products/surface/lumis-surface/

ORBIX SURFACE

Surface-mounted downlight




VERSIONS	POWER	FLUX
3	12–35 W	864–2765 lm

BEAM ANGLE	16° / 24° / 40° / 55°
CCT	3000 / 4000 / 5000 K
CRI	≥90
DIMMING	On request
FINISH	White, Black
LIGHT OPTIONS	Single CCT, dim to warm
UGR	<10







CODE	U-C704-SMD4	U-C704-SMD5	U-C704-SMD6
DRAWING	 U-C704-SMD4	 U-C704-SMD5	 U-C704-SMD6
POWER	12 W	24 W	35 W
FLUX	864 / 936 / 948 lm	1800 / 1992 / 2040 lm	2765 / 2975 / 3045 lm
EFFICACY	78-79 lm/W	75-85 lm/W	79-87 lm/W
CURRENT	300 mA	600 mA	850 mA

Product page and enquiries
labos.com.tr/products/surface/orbix-surface/

SOLARIS

Surface-mounted downlight




VERSIONS	POWER	FLUX
3	4–12 W	264–1260 lm

CCT	3000 / 4000 / 5000 K
CRI	≥90
DIMMING	
FINISH	White, Black, Gold, Bronze, Nickel
LIGHT OPTIONS	Single CCT
UGR	<19







CODE	U-D1067-COB1	U-D1067-COB2	U-D1067-COB3
DRAWING	 U-D1067-COB1	 U-D1067-COB2	 U-D1067-COB3
POWER	4 W	8 W	12 W
FLUX	264 / 280 / 288 lm	776 / 824 / 840 lm	1260 / 1320 / 1344 lm
EFFICACY	66-72 lm/W	97-105 lm/W	105-112 lm/W
BEAM ANGLE	24° / 36°	24° / 30° / 42°	20° / 24° / 40°


Product page and enquiries
labos.com.tr/products/surface/solaris/


LINVERA

Pendant

VERSIONS	POWER
1	30 W

CCT	(UGR<16) / 3000 K
CRI	≥90
DIMMING	On request
FINISH	White, Black, Gold, Nickel
LIGHT OPTIONS	Single CCT, dim-to-warm, tunable white

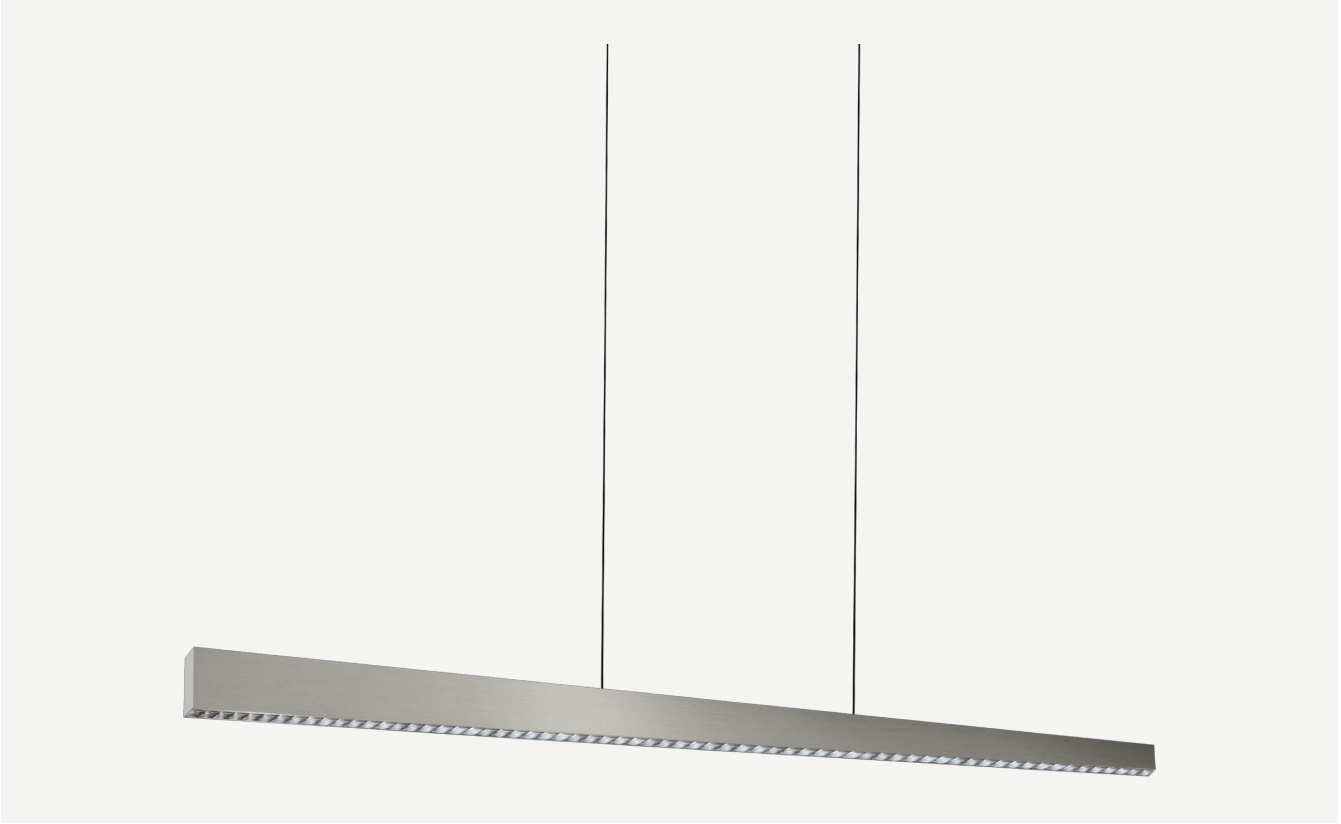



CODE	U-P972-SMD1100
POWER	30 W
FLUX	- / 2400 lm
EFFICACY	80-350 lm/W
CURRENT	1200 mA
BEAM ANGLE	40°

Product page and enquiries
labos.com.tr/products/surface/linvera/

LUTRIVA

Pendant

VERSIONS	POWER	FLUX
1	15 W	630 lm

CCT	3000 K
CRI	≥90
DIMMING	On request
FINISH	Rose, Brushed, Coffee





CODE	**U-P1073-SMD700**
DRAWING	 U-P1073-SMD700
POWER	15 W
FLUX	630 lm
EFFICACY	42-42 lm/W
CURRENT	600 mA
BEAM ANGLE	100°

Product page and enquiries
labos.com.tr/products/surface/lutriva/

ORBELIA L

Pendant

VERSIONS	FLUX
2	4620–4740 lm


POWER	60 W
BEAM ANGLE	40°
CCT	3000 K
CRI	≥90
DIMMING	On request
FINISH	White, Black, Gold, Nickel

LIGHT OPTIONS







CODE	U-P986-SMD650-2	U-P986-SMD850
DRAWING	 U-P986-SMD850	
FLUX	4740 lm	4620 lm
EFFICACY	–	77-77 lm/W

Product page and enquiries
labos.com.tr/products/surface/orbelia-l/

ORBELIA S

Pendant

VERSIONS	POWER	FLUX
3	40–120 W	2856–8541 lm


EFFICACY	71-71 lm/W
BEAM ANGLE	40°
CCT	3000 K
CRI	≥90
DIMMING	On request
FINISH	White, Black, Gold, Nickel
LIGHT OPTIONS	Single CCT, dim-to-warm, tunable white









CODE	U-P985-SMD670	U-P985-SMD670-2	U-P985-SMD885-3
DRAWING	 U-P985-SMD670-2		
POWER	40 W	60 W	120 W
FLUX	2856 lm	4281 lm	8541 lm

Product page and enquiries
labos.com.tr/products/surface/orbelia-s/

EDGE CLASSIC



Pendant

VERSIONS	POWER	FLUX
2	12–20 W	780–1840 lm

CCT	3000 / 4000 / 5000 K
CRI	≥90
DIMMING	On request
FINISH	White, Black
LIGHT OPTIONS	Single CCT, dim-to-warm, tunable white



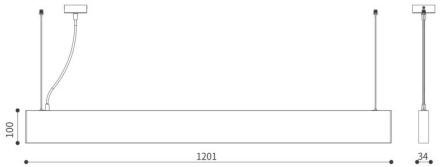

CODE	U-D107-24PM	U-D107-24PM-X
DRAWING		 U-D107-24PM-X
POWER	12 W	20 W
FLUX	780 / 816 / 780 lm	1840 / 1900 / 1920 lm
EFFICACY	65-70 lm/W	92-96 lm/W
CURRENT	800 mA	500 mA
BEAM ANGLE	100°	15° / 25° / 35°
HEIGHT	100 mm	–

Product page and enquiries
labos.com.tr/products/surface/edge-classic/


EDGE MINI

Pendant

VERSIONS	POWER	FLUX
4	10–30 W	650–2130 lm

CCT	3000 / 4000 / 5000 K
CRI	≥90
DIMMING	On request
FINISH	White, Black
LIGHT OPTIONS	Single CCT, dim-to-warm, tunable white

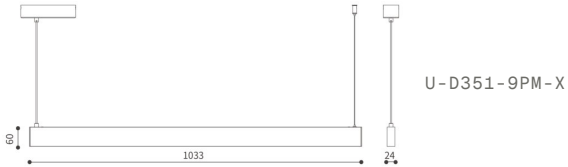

CODE	U-D351-9P	U-D351-9P-X	U-D351-9PM	U-D351-9PM-X
DRAWING				
POWER	10 W	30 W	10 W	20 W
FLUX	650 / 680 / 700 lm	2130 / 2280 / 2340 lm	650 / 680 / 700 lm	1400 / 1520 / 1540 lm
EFFICACY	65-70 lm/W	71-76 lm/W	65-70 lm/W	70-76 lm/W
CURRENT	1000 mA	750 mA	750 mA	500 mA
BEAM ANGLE	100°	24° / 38°	100°	24° / 38°
HEIGHT	60 mm	–	60 mm	–

Product page and enquiries
labos.com.tr/products/surface/edge-mini/

CIRVONA

Pendant

VERSIONS	POWER	FLUX
1	15 W	600 lm

CCT	3000 K
CRI	≥80
DIMMING	On request
FINISH	Rose, Coffee, Brushed, Gold, Brown, Nickel





CODE	**U-P1070-SMD650**
DRAWING	 U-P1070-SMD650
POWER	15 W
FLUX	600 lm
EFFICACY	40-40 lm/W
CURRENT	350 mA
BEAM ANGLE	100°

Product page and enquiries
labos.com.tr/products/surface/cirvona/

CELIS


Surface-mounted spotlight

VERSIONS	POWER	FLUX
2	2–9 W	1041 lm

ADJUSTMENT	Tilt 0–45°, rotation 350°
CCT	3000 K, 1800–3000 K DTW
CRI	90 / 97
IP	IP20
DIMMING	TRIAC
VOLTAGE	220–240 V





CODE	Celis	Celis 2
DRAWING		
POWER	9 W / 10 W	2×9 W / 2×10 W
FLUX	1041 lm / 36–1088 lm	1041 lm / 36–1088 lm
CURRENT	500 mA / 300 mA	500 mA / 300 mA
BEAM ANGLE	24° / 36° / 48°	24° / 36° / 48°
DIMENSIONS	Ø85 × 102 mm	215 × 115 mm

Product page and enquiries
labos.com.tr/products/surface/celis-surface/

HYDROS

Surface-mounted and pendant downlight

VERSIONS	POWER	FLUX
31	8.2–21 W	984–1146 lm

CCT	2700 / 3000 K, 1800–3000 K DTW
CRI	80 / 90 / 97
IP	IP20 / IP44 / IP54
DIMMING	TRIAC / DALI
VOLTAGE	220–240 V



31 VERSIONS



Hydros Extra S-Hydros Extra G2 Fixed U&D

4 VERSIONS, P. 151



Hydros Extra Fixed S-Hydros S Flat Base-3

4 VERSIONS, P. 152



Hydros S Flat Base-4-Hydros Extra S Fixed U&D

4 VERSIONS, P. 153



Hydros Fixed-Hydros S Fixed

4 VERSIONS, P. 154



Hydros S Fixed U&D-Hydros S

4 VERSIONS, P. 155



Hydros Extra G2-Hydros 2

4 VERSIONS, P. 156



Hydros Extra Susp Adj U&D-Hydros Flat Base-4

4 VERSIONS, P. 157



Hydros Flat Base-5-Hydros Extra S Susp Adj U&D

3 VERSIONS, P. 158

Product page and enquiries
labos.com.tr/products/surface/hydros-surface/

HYDROS

Surface-mounted and pendant downlight

VERSIONS 1-4 OF 31

	CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	ADJUSTMENT
	Hydros Extra S	9 W	–	–	–	90 mm size	–
	Hydros Extra S 2	18 W	–	–	–	90 mm size	–
	Hydros S 2	18 W	–	–	–	90 mm size	–
	Hydros Extra G2 Fixed U&D	12 W	–	–	–	120 mm size	Fixed

HYDROS

Surface-mounted and pendant downlight



VERSIONS 5-8 OF 31

	CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	ADJUSTMENT
	Hydros Extra Fixed S	9 W	–	–	–	90 mm size	Fixed
	Hydros G2 Fixed U&D	12 W	–	–	–	120 mm size	Fixed
	Hydros S Flat Base-2	–	–	–	–	480 × 78 × 13 mm	–
	Hydros S Flat Base-3	–	–	–	–	880 × 78 × 13 mm	–

HYDROS

Surface-mounted and pendant downlight




VERSIONS 9-12 OF 31

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	ADJUSTMENT
		Hydros S Flat Base-4	–	–	–	–	1180 × 78 × 13 mm	–
		Hydros S Flat Base-5	–	–	–	–	1480 × 78 × 13 mm	–
		Hydros Extra S Fixed	9 W / 10 W	1000 lm / 1041 lm	500 mA / 300 mA	33° / 40° / 50°	Ø90 × 59 mm	Fixed
		Hydros Extra S Fixed U&D	8.2 W + 1.3 W	984 lm direct + 183 lm indirect	470 mA	33° / 40° / 50°	Ø90 × 59 mm	Fixed

HYDROS




Surface-mounted and pendant downlight

VERSIONS 13-16 OF 31

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	ADJUSTMENT
		**Hydros Fixed**	–	–	–	–	–	–
		**Hydros Extra Fixed G2**	10–12 W	1075–1667 lm	500 mA / 350 mA	30° / 42° / 62°	Ø120 × 69 mm	Fixed
		**Hydros Extra Fixed G2 U&D**	10.4–12.2 W + 1.3–2.0 W	1075–1370 lm direct + 130–200 lm indirect	500 mA / 350 mA	30° / 42° / 62°	Ø120 × 69 mm	Fixed
		**Hydros S Fixed**	9 W / 10 W	1000 lm / 1041 lm	500 mA	23° / 33° / 50°	Ø90 × 53 mm	Fixed

HYDROS





Surface-mounted and pendant downlight

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	ADJUSTMENT
		Hydros S Fixed U&D	8.2 W + 1.3 W	984 lm direct + 183 lm indirect	470 mA	23° / 33° / 50°	Ø90 × 53 mm	Fixed
		Hydros Fixed G2	10–12 W	1075–1667 lm	500 mA / 350 mA	33° / 48°	Ø120 × 55 mm	Fixed
		Hydros Fixed U&D G2	10.4–12.2 W + 1.3–2.0 W	1075–1370 lm direct + 130–200 lm indirect	500 mA / 350 mA	34° / 48°	Ø120 × 55 mm	Fixed
		Hydros S	–	–	–	–	–	–

HYDROS

Surface-mounted and pendant downlight

VERSIONS 21-24 OF 31

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	ADJUSTMENT
		Hydros Extra G2	10 W / 12 W	1075–1667 lm	500 mA / 350 mA	30° / 42° / 62°	Ø120 × 81 mm	–
		Hydros	10 W / 12 W	1075–1667 lm	500 mA / 350 mA	33° / 48°	Ø120 × 66 mm	–
		Hydros Extra 2	–	–	–	–	290 × Ø120 × 83 mm	–
		Hydros 2	–	–	–	–	290 × Ø120 × 70 mm	–

HYDROS

Surface-mounted and pendant downlight


VERSIONS 25-28 OF 31

	CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	ADJUSTMENT
	**Hydros Extra Susp Adj U&D**	21 W / 20 W	1146 lm up + 1146 lm down	300 mA	Up 100° diffused or 75° lens	Ø120 × 66 / 80 mm	Height adjustable 0.5–1.8 m
	**Hydros Flat Base-2**	–	–	–	–	720 × 120 × 13 mm	–
	**Hydros Flat Base-3**	–	–	–	–	1320 × 120 × 13 mm	–
	**Hydros Flat Base-4**	–	–	–	–	1920 × 120 × 13 mm	–

HYDROS

Surface-mounted and pendant downlight

VERSIONS 29-31 OF 31

	CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	ADJUSTMENT
	**Hydros Flat Base-5**	–	–	–	–	2520 × 120 × 13 mm	–
	**Hydros Extra S Susp Adj**	8.7 W	1000 lm / 1041 lm	500 mA	33° / 40° / 50°	Ø78 × 70 mm	Manually adjustable height
	**Hydros Extra S Susp Adj U&D**	13 W	1041 lm down + 550 lm up	500 mA	Down 33° / 40° / 50°	–	–

AURIS

Surface-mounted and pendant spotlight

VERSIONS	POWER	FLUX
38	2–9 W	976–1000 lm

CCT	2700 / 3000 K, 1800–3000 K DTW
CRI	80 / 90
IP	IP20 / IP44 / IP54
DIMMING	TRIAC / On/off
VOLTAGE	220–240 V / 100–240 V




38 VERSIONS



Auris ED Adj R/SQ-Auris Slim

5 VERSIONS, P. 160



Auris Slim R1-Auris Slim N2

5 VERSIONS, P. 161




Auris Slim N4-Auris Slim Air

5 VERSIONS, P. 162



Auris Slim KN1-Auris Mini ED IP

5 VERSIONS, P. 163



Auris Air IP-Auris Mini R1

5 VERSIONS, P. 164



Auris Mini Air-Auris Mini R3

5 VERSIONS, P. 165



Auris Mini K2-Auris Mini SGR E2

5 VERSIONS, P. 166



Auris Mini SGR E3-Auris Slim Susp




3 VERSIONS, P. 167

Product page and enquiries
labos.com.tr/products/surface/auris-surface/

AURIS





Surface-mounted and pendant spotlight

VERSIONS 1-5 OF 38

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	ADJUSTMENT
		**Auris ED Adj R/SQ**	9 W / 7.5 W	–	–	24° / 36° / 48°	Ø96 × 108 / 96 × 96 × 108 mm	–
		**Auris ED Adj SQ2**	2×8.7 W / 2×7.5 W	–	–	24° / 36° / 48°	199 × 98 × 108 mm	–
		**Auris ED Adj R**	9 W / GU10 max 7.5 W	1000 lm / 1046 lm	500 mA	17° / 39° / 51°	Ø96 × 108 mm	Tilt 0–26°, rotation 355°
		**Auris ED Adj SQ**	9 W / GU10 max 7.5 W	1000 lm / 1046 lm	500 mA	17° / 39° / 51°	96 × 96 × 108 mm	Tilt 0–26°, rotation 355°
		**Auris Slim**	–	–	–	–	–	–

AURIS





Surface-mounted and pendant spotlight

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	ADJUSTMENT
		**Auris Slim R1**	4.5 W	–	–	–	Ø80 × 145 mm	Rotation 350°, tilt 90°
		**Auris Slim R2**	2×4.5 W	–	–	–	Ø127 × 145 mm	Rotation 350°, tilt 90°
		**Auris Slim R3**	3×4.5 W	–	–	–	Ø200 × 145 mm	Rotation 350°, tilt 90°
		**Auris Slim N1**	4.5 W	–	–	–	128 × 42 × 148 mm	Rotation 350°, tilt 90°
		**Auris Slim N2**	2×4.5 W	–	–	–	220 × 42 × 148 mm	Rotation 350°, tilt 90°

AURIS

Surface-mounted and pendant spotlight






VERSIONS 11-15 OF 38

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	ADJUSTMENT
		Auris Slim N4	4×4.5 W	–	–	–	480 × 42 × 148 mm	Rotation 350°, tilt 90°
		Auris Slim N6	6×4.5 W	–	–	–	850 × 42 × 148 mm	Rotation 350°, tilt 90°
		Auris Slim K4 SQ	4×4.5 W	–	–	–	240 × 240 × 145 mm	Rotation 350°, tilt 90°
		Auris Slim ED	4.5 W	–	–	–	Ø42 × 114 mm	Fixed
		Auris Slim Air	4.5 W	–	–	–	Ø42 × 145 mm	Tilt 90°, rotation 350°

AURIS

Surface-mounted and pendant spotlight





VERSIONS 16-20 OF 38

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	ADJUSTMENT
		**Auris Slim KN1**	4.5 W	–	–	–	Ø42 × 148 mm	Tilt 90°, rotation 350°
		**Auris Slim KN2**	2×4.5 W	–	–	–	200 × 64 × 148 mm	Tilt 90°, rotation 350°
		**Auris Slim KN3**	3×4.5 W	–	–	–	340 × 64 × 148 mm	Tilt 90°, rotation 350°
		**Auris Slim KN4**	4×4.5 W	–	–	–	480 × 64 × 148 mm	Tilt 90°, rotation 350°
		**Auris Mini ED IP**	7.5 W	–	–	–	Ø60 × 105 mm	Fixed

AURIS

Surface-mounted and pendant spotlight






VERSIONS 21-25 OF 38

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	ADJUSTMENT
		**Auris Air IP**	7.5 W	–	–	–	Ø60 × 136 mm	Tilt 90°, rotation 350°
		**Auris R1 IP**	7.5 W	–	–	–	Ø60 × 125 mm	Tilt 90°, rotation 350°
		**Auris K1 IP**	7.5 W	–	–	–	Ø60 × 125 mm	Tilt 90°, rotation 350°
		**Auris K2 IP**	2×7.5 W	–	–	–	305 × 90 × 125 mm	Tilt 90°, rotation 350°
		**Auris Mini R1**	7.5 W	–	–	–	Ø80 × 125 mm	Rotation 350°, tilt 90°

AURIS






Surface-mounted and pendant spotlight

VERSIONS 26-30 OF 38

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	ADJUSTMENT
		**Auris Mini Air**	7.5 W	–	–	–	Ø60 × 134 mm	Rotation 350°, tilt 90°
		**Auris Mini K1**	7.5 W	–	–	–	110 × 90 × 125 mm	Rotation 350°, tilt 90°
		**Auris Mini K4**	4×7.5 W	–	–	–	650 × 90 × 125 mm	Rotation 350°, tilt 90°
		**Auris Mini R2**	2×7.5 W	–	–	–	Ø200 × 125 mm	Rotation 350°, tilt 90°
		**Auris Mini R3**	3×7.5 W	–	–	–	Ø250 × 125 mm	Rotation 350°, tilt 90°

AURIS



Surface-mounted and pendant spotlight

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	ADJUSTMENT
		**Auris Mini K2**	2×7.5 W	–	–	–	305 × 90 × 125 mm	Rotation 350°, tilt 90°
		**Auris Mini K3**	3×7.5 W	–	–	–	480 × 90 × 125 mm	Rotation 350°, tilt 90°
		**Auris Mini K4 SQ**	4×7.5 W	–	–	–	240 × 240 × 125 mm	Rotation 350°, tilt 90°
		**Auris Mini SGR E1**	7.5 W	–	–	–	175 × 32 × 142 mm	Tilt 90°, rotation 350°
		**Auris Mini SGR E2**	2×7.5 W	–	–	–	336 × 32 × 142 mm	Tilt 90°, rotation 350°

AURIS

Surface-mounted and pendant spotlight

VERSIONS 36-38 OF 38

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	ADJUSTMENT
		**Auris Mini SGR E3**	3×7.5 W	–	–	–	560 × 32 × 142 mm	Tilt 90°, rotation 350°
		**Auris Mini ED**	9 W	976–1173 lm	500 mA	24° / 34° / 48°	Ø60 × 112 mm	Fixed
		**Auris Slim Susp**	4.5 W	–	–	–	Ø42 × 286 / 400 mm	Tilt 90°, rotation 350°

AZURE

Surface-mounted spotlight

VERSIONS	POWER	FLUX
13	2–9 W	1000 lm

CCT	2700 / 3000 K, 1800–3000 K DTW
CRI	90
IP	IP20
DIMMING	TRIAC / DALI
VOLTAGE	220–240 V



13 VERSIONS



Azure-Azure Air

4 VERSIONS, P. 169



Azure R1-Azure K1

4 VERSIONS, P. 170



Azure K2-Azure K4 SQ

4 VERSIONS, P. 171



Azure H

1 VERSION, P. 172

Product page and enquiries
labos.com.tr/products/surface/azure-surface/

AZURE

Surface-mounted spotlight




VERSIONS 1-4 OF 13

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	ADJUSTMENT
		**Azure**	–	–	–	–	–	–
		**Azure KN**	9 W / 12 W	–	–	15° / 24° / 36° / 50°	Ø82 × 101 mm	–
		**Azure Plus**	9 / 12 W	1000–1370 lm	500 mA / 350 mA	14–50°	Ø82 × 100 mm	Tilt 0–75°, rotation 350°
		**Azure Air**	7.5 W	–	–	–	Ø65 × 135 mm	Rotation 350°, tilt 90°

AZURE

Surface-mounted spotlight





VERSIONS 5-8 OF 13

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	ADJUSTMENT
		**Azure R1**	7.5 W	–	–	–	Ø65 × 124 mm	Rotation 350°, tilt 90°
		**Azure R2**	2×7.5 W	–	–	–	Ø200 × 124 mm	Rotation 350°, tilt 90°
		**Azure R3**	3×7.5 W	–	–	–	Ø250 × 124 mm	Rotation 350°, tilt 90°
		**Azure K1**	7.5 W	–	–	–	90 × 110 × 124 mm	Rotation 350°, tilt 90°

AZURE

Surface-mounted spotlight


VERSIONS 9-12 OF 13

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	ADJUSTMENT
		Azure K2	2×7.5 W	–	–	–	305 × 90 × 124 mm	Rotation 350°, tilt 90°
		Azure K3	3×7.5 W	–	–	–	480 × 90 × 124 mm	Rotation 350°, tilt 90°
		Azure K4	4×7.5 W	–	–	–	650 × 90 × 124 mm	Rotation 350°, tilt 90°
		Azure K4 SQ	4×7.5 W	–	–	–	240 × 240 × 124 mm	Rotation 350°, tilt 90°

AZURE

Surface-mounted spotlight

VERSIONS 13-13 OF 13

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	ADJUSTMENT
		**Azure H**	7.5 W	–	–	–	Ø100 × 170 mm, canopy Ø75, 1735 mm total drop	Fixed

SFERRA



Surface-mounted spotlight

VERSIONS	POWER	FLUX
2	9–10 W	976 lm

CCT	3000 K, 1800–3000 K DTW
CRI	80 / 90
IP	IP20
DIMMING	On/off / TRIAC
VOLTAGE	100–240 V / 220–240 V





CODE	Sferra 75S	Sferra
DRAWING		
POWER	10 W	9 W / 12 W
FLUX	–	976–1173 lm / 1356–1656 lm
CURRENT	–	500 mA / 350 mA
BEAM ANGLE	17° / 39° / 51°	Reflector 24° / 34° / 48°, 25° / 36° / 50°, 24° / 33° / 50°
DIMENSIONS	Ø75 × 98 mm	Ø102 × 84 mm
ADJUSTMENT	–	Tilt 0–45°, rotation 350°

Product page and enquiries
labos.com.tr/products/surface/sferra-surface/

BARRA





Pendant

VERSIONS	POWER
4	3–6 W

IP	IP20
VOLTAGE	220–240 V AC






CODE	Barra Susp S900 D3	Barra Susp S900 U2/D3	Barra Susp S1200 D4	Barra Susp S1200 U2/D4
DRAWING				
POWER	3×7.5 W	5×7.5 W	4×7.5 W	6×7.5 W
DIMENSIONS	900 mm bar	900 mm bar	1200 mm bar	1200 mm bar

Product page and enquiries
labos.com.tr/products/surface/barra-surface/

PIVORA

Surface-mounted and pendant spotlight

VERSIONS	POWER	FLUX
11	2–18 W	676–1987 lm

CCT	2700 / 3000 K, 1800–3000 K DTW
CRI	80 / 90 / 97
IP	IP20
DIMMING	TRIAC / On/off / DALI
VOLTAGE	220–240 V / 100–240 V



11 CONFIGURATIONS



Pivora Tilt

1 VERSION, P. 176



Pivora Tilt Mini

1 VERSION, P. 176



Pivora Mini G2

1 VERSION, P. 176



Pivora G2

1 VERSION, P. 176



Pivora Maxi

1 VERSION, P. 177



Pivora Susp

1 VERSION, P. 177



Pivora Susp U&D

1 VERSION, P. 177



Pivora Flat Base-2

1 VERSION, P. 177



Pivora Flat Base-3

1 VERSION, P. 178



Pivora Flat Base-4

1 VERSION, P. 178



Pivora Flat Base-5


1 VERSION, P. 178

Product page and enquiries
labos.com.tr/products/surface/pivora-surface/

PIVORA

Surface-mounted and pendant spotlight



VERSIONS 1-4 OF 11

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	ADJUSTMENT
		**Pivora Tilt**	–	–	–	–	–	–
		**Pivora Tilt Mini**	8.7 W	1000 lm / 1046 lm	500 mA	24° / 34° / 46°	Ø84 × 82 mm	Tilt 65°, rotation 350°
		**Pivora Mini G2**	6–9 W	681–1173 lm	350 mA / 500 mA	24° / 34° / 46°	Ø75 × 91 mm	Rotation 350°, tilt 90°
		**Pivora G2**	9–14 W	976–1474 lm	350 mA / 500 mA	24° / 34° / 48°	Ø100 × 103 mm	Rotation 350°, tilt 90°

PIVORA

Surface-mounted and pendant spotlight

VERSIONS 5-8 OF 11

		CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	ADJUSTMENT
		**Pivora Maxi**	18–28 W	1987–3810 lm	500 mA / 800 mA	24° / 36° / 47°	Ø125 × 128 mm	Rotation 350°, tilt 90°
		**Pivora Susp**	8.9 W / 13.8 W / 11.8 W	976–1474 lm / 36–1265 lm	500 mA / 350 mA	34° / 48°	Ø100 × 62 mm	–
		**Pivora Susp U&D**	2×6.1 W / 2×6.7 W / 2×6 W	676–811 lm per side	350 mA / 400 mA	33° / 48°	Ø100 × 69 mm	–
		**Pivora Flat Base-2**	–	–	–	–	700 × 100 × 13 mm	–

PIVORA

Surface-mounted and pendant spotlight

VERSIONS 9-11 OF 11

	CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS	ADJUSTMENT
	Pivora Flat Base-3	–	–	–	–	1300 × 100 × 13 mm	–
	Pivora Flat Base-4	–	–	–	–	1900 × 100 × 13 mm	–
	Pivora Flat Base-5	–	–	–	–	2500 × 100 × 13 mm	–

PROFOND

Surface-mounted downlight

VERSIONS	POWER	FLUX
4	8.7 W	1000 lm




ADJUSTMENT	Fixed
CCT	2700 / 3000 K, 1800–3000 K DTW
CRI	90 / 97
IP	IP54
DIMMING	On/off / TRIAC
VOLTAGE	220–240 V









CODE	Profond SQ	Profond R	Profond Plus SQ	Profond Plus R
DRAWING				
POWER	8.7 W	8.7 W	8.7 W	8.7 W
FLUX	1000 lm / 1046 lm	1000 lm / 1046 lm	1000 lm / 1046 lm	1000 lm / 1046 lm
CURRENT	500 mA	500 mA	500 mA	500 mA
BEAM ANGLE	18° / 32° / 43°	18° / 32° / 43°	35–49°	35–49°
DIMENSIONS	90 × 90 × 74 mm	Ø90 × 74 mm	90 × 90 × 65 mm	Ø90 × 65 mm

Product page and enquiries
labos.com.tr/products/surface/profond-surface/

LUMETRIX

Surface-mounted linear spotlight

VERSIONS	POWER	FLUX
4	5–10 W	750–1500 lm





ADJUSTMENT	Fixed
CRI	80 / 90
IP	IP20
DIMMING	TRIAC
VOLTAGE	220–240 V / 100–240 V









CODE	Lumetrix Mini 10 ED	Lumetrix Mini 5 ED	Lumetrix 5 ED Wall Wash	Lumetrix 5 ED
DRAWING				
POWER	10×1.5 W	5×1.5 W	5×2 W	5×2 W
FLUX	1500–1620 lm	750–810 lm	1000–1075 lm	1050–1250 lm
CURRENT	500 mA	500 mA	700 mA	700 mA
BEAM ANGLE	36° / 50°	36° / 50°	Asymmetric	32° / 46°
DIMENSIONS	266 × 25 × 64 mm	175 × 25 × 64 mm	140 × 47 × 80 mm	140 × 47 × 75 mm

Product page and enquiries
labos.com.tr/products/surface/lumetrix-surface/

STYLON

Surface-mounted spotlight




VERSIONS	POWER	FLUX
3	2–9 DTW	2–873 lm

CCT	3000 K, 1800–3000 K DTW
CRI	80 / 90
IP	IP20
DIMMING	Trailing edge
VOLTAGE	220–240 V







CODE	Stylon	Stylon R1 80	Stylon R2
DRAWING			
POWER	8.8 W / 10 W DTW	9 W / 10 W	2×9 W / 2×10 W
FLUX	–	873–1040 lm	2×873–1040 lm
CURRENT	–	250 mA / 300 mA	250 mA / 300 mA
BEAM ANGLE	–	18° / 25° / 33°	18° / 25° / 33°
DIMENSIONS	Ø42 body	Ø42 × 175 mm	Ø42 × 175 mm per head
ADJUSTMENT	–	Tilt 0–60°, rotation 350°	Tilt 0–60°, rotation 350°

Product page and enquiries
labos.com.tr/products/surface/stylon-surface/

STYLON SLIM



Surface-mounted spotlight

VERSIONS	POWER	FLUX
2	2–7 W	754 lm

CCT	2700 / 3000 K
CRI	90
IP	IP20
DIMMING	Trailing edge
VOLTAGE	220–240 V AC





CODE	Stylon Slim ED 2	Stylon Slim ED
DRAWING		
POWER	2×8.9 W	7 W
FLUX	–	754 / 788 lm
CURRENT	–	200 mA
BEAM ANGLE	24° / 36°	24° / 36°
DIMENSIONS	220 × 30 × 160 mm	152 × 30 × 160 mm
ADJUSTMENT	–	Tilt 0–60°, rotation 350°


Product page and enquiries
labos.com.tr/products/surface/stylon-slim/

GRADIA


Recessed wall light

VERSIONS	POWER
8	1.8 W

CCT	2700 / 3000 / 4000 K
CRI	90
IP	IP20

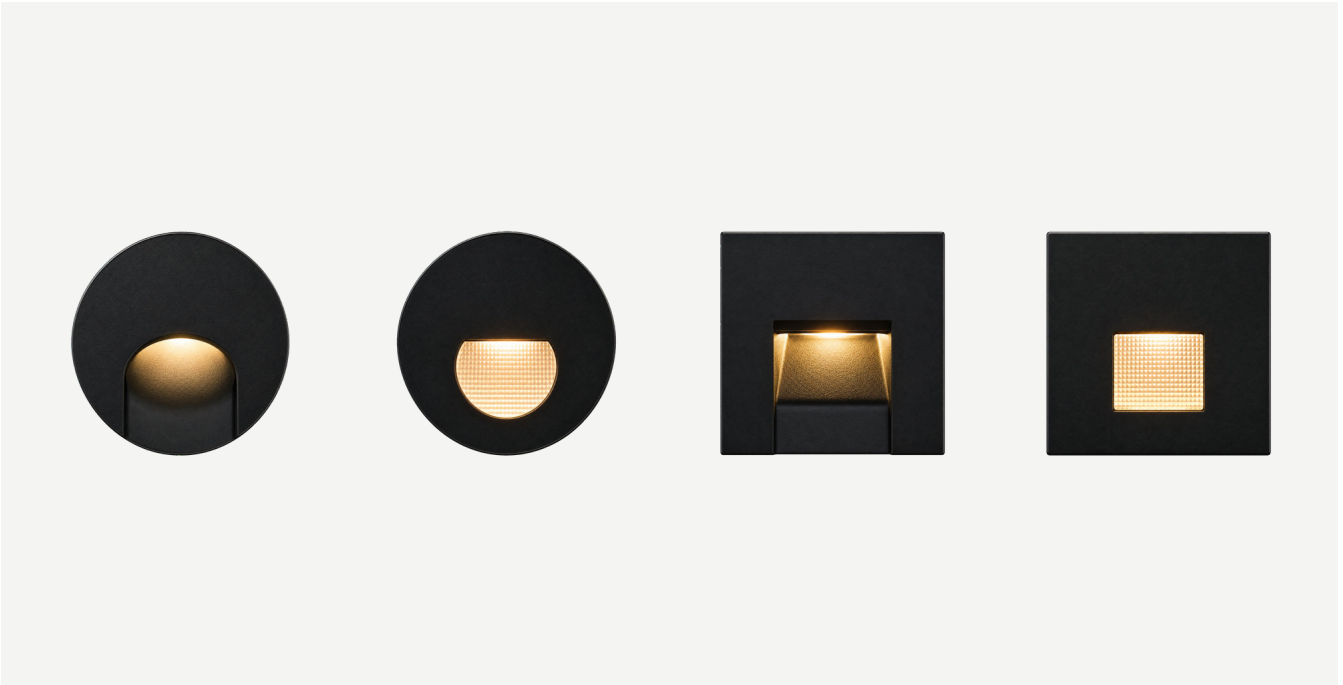


8 CONFIGURATIONS




Gradia R W

1 VERSION, P. 184




Gradia G R Soften

1 VERSION, P. 184




Gradia SQ W

1 VERSION, P. 184



Gradia G SQ Soften

1 VERSION, P. 184



Gradia R

1 VERSION, P. 185



Gradia R Soften

1 VERSION, P. 185



Gradia SQ

1 VERSION, P. 185




Gradia SQ Soften

1 VERSION, P. 185

Product page and enquiries
labos.com.tr/products/surface/gradia/

GRADIA Recessed wall light

VERSIONS 1-4 OF 8

		CODE	POWER	DIMENSIONS	CUT-OUT
		**Gradia R W**	1.8 W	Ø75 mm	Ø68 mm
		**Gradia G R Soften**	1.8 W	Ø75 mm	Ø68 mm
		**Gradia SQ W**	1.8 W	75 × 75 mm	Ø68 mm
		**Gradia G SQ Soften**	1.8 W	75 × 75 mm	Ø68 mm

GRADIA Recessed wall light

VERSIONS 5-8 OF 8

		CODE	POWER	DIMENSIONS	CUT-OUT
		**Gradia R**	1.8 W	Ø75 mm	Ø68 mm
		**Gradia R Soften**	1.8 W	Ø75 mm	Ø68 mm
		**Gradia SQ**	1.8 W	75 × 75 mm	Ø68 mm
		**Gradia SQ Soften**	1.8 W	75 × 75 mm	Ø68 mm

VERTIS

Linear wall light

VERSIONS	POWER
2	5–10 W

CCT	2700 / 3000 / 4000 K
IP	IP65
DIMMING	On/off / TRIAC / DALI



CODE	Vertis G2 1200 mm	Vertis G2 600 mm
POWER	10 W	5 W
DIMENSIONS	1200 × 44 mm	600 × 44 mm

Product page and enquiries
labos.com.tr/products/surface/vertis/


PICTORA

Picture light

VERSIONS	POWER
1	7 W

IP	IP44
DIMMING	On/off / TRIAC



CODE	Pictora
DRAWING	
POWER	7 / 10 / 13 W
DIMENSIONS	300 / 450 / 600 × 110 × 40 mm

Product page and enquiries
labos.com.tr/products/surface/pictora/





PERLA

Ceiling and wall light

VERSIONS	POWER
6	9–14.3 W

CCT	2700 / 3000 / 4000 K
CRI	90
IP	IP65
DIMMING	On/off / TRIAC / DALI



CODE	Perla 10 B	Perla A	Perla B	Perla C	Perla Module	Perla 10 Module
DRAWING						
POWER	14.3 W	9 W	9 W	9 W	9 W	14.3 W
DIMENSIONS	Ø260 × 68 mm	Ø130 × 71 mm	Ø130 × 68 mm	Ø130 × 68 mm	–	–

Product page and enquiries
labos.com.tr/products/surface/perla/

RONDO

Surface-mounted and pendant spotlight

VERSIONS	POWER
9	2–7.5 W

IP	IP20 / IP54
VOLTAGE	220–240 V



9 CONFIGURATIONS



Rondo ED IP

1 VERSION, P. 190



Rondo SGR E1

1 VERSION, P. 190



Rondo SGR E2

1 VERSION, P. 190



Rondo SGR E3

1 VERSION, P. 190



Rondo R1

1 VERSION, P. 190



Rondo Air

1 VERSION, P. 191



Rondo K1

1 VERSION, P. 191



Rondo K4

1 VERSION, P. 191



Rondo Susp





1 VERSION, P. 191

Product page and enquiries
labos.com.tr/products/surface/rondo-surface/

RONDO

Surface-mounted and pendant spotlight




VERSIONS 1-5 OF 9

		CODE	POWER	DIMENSIONS	ADJUSTMENT
		**Rondo ED IP**	7.5 W	Ø60 × 108 mm	Fixed
		**Rondo SGR E1**	7.5 W	175 × 32 × 140 mm	Tilt 90°, rotation 350°
		**Rondo SGR E2**	2×7.5 W	336 × 32 × 140 mm	Tilt 90°, rotation 350°
		**Rondo SGR E3**	3×7.5 W	560 × 32 × 140 mm	Tilt 90°, rotation 350°
		**Rondo R1**	7.5 W	Ø80 × 123 mm	Rotation 350°, tilt 90°

RONDO

Surface-mounted and pendant spotlight

VERSIONS 6-9 OF 9

		CODE	POWER	DIMENSIONS	ADJUSTMENT
		**Rondo Air**	7.5 W	Ø60 × 133 mm	Rotation 350°, tilt 90°
		**Rondo K1**	7.5 W	110 × 90 × 123 mm	Rotation 350°, tilt 90°
		**Rondo K4**	4×7.5 W	650 × 90 × 123 mm	Rotation 350°, tilt 90°
		**Rondo Susp**	7.5 W	Ø60 × 154 / 274 / 354 mm	–

GIZNOVA

Surface-mounted multi-head spotlight

VERSIONS	POWER	FLUX
3	8.9–11.4 W	976–1266 lm

CCT	3000 K, 1800–3000 K DTW
CRI	80 / 90
IP	IP20
DIMMING	TRIAC
VOLTAGE	220–240 V / 100–240 V







CODE	Giznova ED Apollo	Giznova ED Fixed	Giznova ED G2
POWER	11.4 W / 2×11.4 W	8.9 W / 9 W DTW / 2× double	9 W / 2×8.9 W
FLUX	1266–1478 lm	976–1173 lm	976–1173 lm
CURRENT	300 mA	500 mA	500 mA
BEAM ANGLE	24° / 36°	34° / 48°	34° / 48°
DIMENSIONS	Ø94 × 94 / 94 × 94 × 94 / 186 × 94 × 94 mm	Ø94 × 94 / 94 × 94 × 94 / 186 × 94 × 94 mm	Ø94 × 94 / 94 × 94 × 94 / 186 × 94 × 94 mm
ADJUSTMENT	Fixed	Fixed	Tilt 0–20°, rotation 350°

Product page and enquiries
labos.com.tr/products/surface/giznova-surface/

COLONA

Surface-mounted downlight

VERSIONS	POWER	FLUX
1	8.9 W	976 lm

ADJUSTMENT	Fixed
CCT	3000 K, 1800–3000 K DTW
CRI	80 / 90
IP	IP43
DIMMING	On/off / TRIAC
VOLTAGE	100–240 V / 220–240 V



CODE	Colona R
DRAWING	

POWER	8.9 W
FLUX	976 lm
CURRENT	500 mA
BEAM ANGLE	33° / 48°
DIMENSIONS	Ø85 × 93 mm


Product page and enquiries
labos.com.tr/products/surface/colona/

QUADRIS

Surface-mounted multi-head spotlight

VERSIONS	POWER	FLUX
1	8.9 W	976 lm

ADJUSTMENT	Fixed
CCT	3000 K, 1800–3000 K DTW
CRI	80 / 90
IP	IP20
DIMMING	On/off / TRIAC
VOLTAGE	220–240 V



CODE	**Quadris ED**
POWER	8.9 W
FLUX	976 lm
CURRENT	500 mA
BEAM ANGLE	35° / 46°
DIMENSIONS	Ø94 × 114 / 94 × 94 × 114 / 186 × 94 × 114 mm

Product page and enquiries
labos.com.tr/products/surface/quadris/

LUMINA

Surface-mounted downlight






VERSIONS	POWER	FLUX
6	2–8.9 W	2–976 lm

ADJUSTMENT	Fixed
CCT	3000 K, 1800–3000 K DTW
CRI	80 / 90
IP	IP20 / IP54
DIMMING	On/off / TRIAC
VOLTAGE	220–240 V / 220–240 V AC








CODE	Lumina Air 2	Lumina Air	Lumina Air R	Lumina 2	Lumina	Lumina R
DRAWING						
POWER	2×8.9 / 2×12.2 W	8.9 / 12.2 W	8.9 W	2×7.5 W	7.5 W	7.5 W
FLUX	2×976 / 2×1370 lm	976 / 1370 lm	976 lm	–	–	–
CURRENT	500 mA / 350 mA	500 mA / 350 mA	500 mA	–	–	–
BEAM ANGLE	34° / 48° and 36° / 50°	34° / 48° and 36° / 50°	34° / 48°	–	–	–
DIMENSIONS	160 × 80 × 82 mm	80 × 80 × 82 mm	Ø80 × 82 mm	160 × 80 × 90 mm	80 × 80 × 90 mm	Ø80 × 90 mm

Product page and enquiries
labos.com.tr/products/surface/lumina/

MODULON

Modular surface and pendant system

VERSIONS	POWER	FLUX
30	2–9.8 W	2–1315 lm

CCT	3000 K, 1800–3000 K DTW
CRI	80 / 90



30 VERSIONS



Modulon 2 + S75U X3-Modulon R Basic + S60

5 VERSIONS, P. 197



Modulon E2 + SL40 L200X2-Modulon R Basic + S40

5 VERSIONS, P. 198



Modulon S75U-Modulon S40

5 VERSIONS, P. 199



Modulon S60-Modulon T26-400

5 VERSIONS, P. 200

Modulon T40-250-Modulon T2646

5 VERSIONS, P. 201



Modulon T4066-Modulon TN350

5 VERSIONS, P. 202

Product page and enquiries
labos.com.tr/products/surface/modulon/

MODULON

Modular surface and pendant system

VERSIONS 1-5 OF 30

	CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS
	Modulon 2 + S75U X3	8.9 W	976 lm	500 mA	17° / 39° / 51°	Ø75 mm
	Modulon R Basic + SL40 100	8.9 W	976 lm	500 mA	24° / 34° / 46°	Ø40 × 105 mm
	Modulon R Basic + SL40 L200	8.9 W	976 lm	500 mA	24° / 34° / 46°	Ø40 × 105 mm
	Modulon R1a + SL60 L200	8.9 W	976 lm	500 mA	24° / 34° / 48°	Ø60 × 90 mm
	Modulon R Basic + S60	–	–	–	–	–

MODULON

Modular surface and pendant system

VERSIONS 6-10 OF 30

	CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS
	Modulon E2 + SL40 L200X2	2×8.9 W	2×976 lm	500 mA	24° / 34° / 46°	Ø40 × 105 mm
	Modulon SQ2 + S75U X3	8.9 W	976 lm	500 mA	17° / 39° / 51°	Ø75 mm
	Modulon R Basic + S40 E	–	–	–	–	–
	Modulon R Basic + S75U	8.9 W	976 lm	500 mA	17° / 39° / 51°	Ø75 mm
	Modulon R Basic + S40	–	–	–	–	–

MODULON

Modular surface and pendant system

VERSIONS 11-15 OF 30

	CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS
	**Modulon S75U**	8.9 W / 9 W	976 lm / 36–1088 lm	500 mA	17° / 39° / 51°	Ø75 mm
	**Modulon T75U**	8.9 W / 9 W	976 lm / 36–1088 lm	500 mA	39° / 51°	Ø75 × 240 mm
	**Modulon SL40**	8.9 W / 9 W	976 lm / 36–1088 lm	500 mA	24° / 34° / 46°	Ø40 × 105 mm
	**Modulon SL60**	8.9 W / 9 W	976 lm / 36–1088 lm	500 mA	24° / 34° / 48°	Ø60 × 90 mm
	**Modulon S40**	8.9 W	976 lm	500 mA	24° / 34° / 46°	Ø40 × 105 mm

MODULON

Modular surface and pendant system

VERSIONS 16-20 OF 30

	CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS
	**Modulon S60**	8.9 W	976 lm	500 mA	24° / 34° / 48°, lens 12°	Ø60 × 90 mm
	**Modulon S40 E**	8.9 W	976 lm	500 mA	24° / 34° / 46°	Ø40 × 117 mm
	**Modulon S60 E**	8.9 W	976 lm	500 mA	24° / 34° / 48°, lens 12°	Ø60 × 106 mm
	**Modulon S75**	8.9 W	976 lm	500 mA	24° / 34° / 46°	Ø75 × 45 mm
	Modulon T26-400	4.6 W	399 lm	500 mA	30° / 42°	Ø26 × 400 mm

MODULON

Modular surface and pendant system

VERSIONS 21-25 OF 30

	CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS
	**Modulon T40-250**	8.9 W	976 lm	500 mA	34° / 48°	Ø40 × 250 / 400 mm
	**Modulon T60-250**	8.9 W	976 lm	500 mA	34° / 48°	Ø60 × 250 / 400 mm
	**Modulon T40 E-262**	8.9 W	976 lm	500 mA	34° / 48°	Ø40 × 262 / 412 mm
	**Modulon T60 E-266**	8.9 W	976 lm	500 mA	34° / 48°	Ø60 × 266 / 416 mm
	**Modulon T2646**	8.9 W	976 lm / 1173 lm	500 mA	36°	Ø46 × 280 mm

MODULON

Modular surface and pendant system

VERSIONS 26-30 OF 30

	CODE	POWER	FLUX	CURRENT	BEAM ANGLE	DIMENSIONS
	**Modulon T4066**	8.9 W	976 lm / 1173 lm	500 mA	36°	Ø66 × 330 mm
	**Modulon T128**	8.6 W	1155 lm	500 mA	–	Ø128 mm
	**Modulon T178**	9.8 W	1315 lm	500 mA	–	Ø178 mm
	**Modulon TN250**	9 W	1071 lm	500 mA	–	Ø250 × 154 mm
	**Modulon TN350**	9 W	1071 lm	500 mA	–	Ø350 × 215 mm

CONICA

Pendant




VERSIONS	POWER
3	7.5–20 W

IP	IP20
VOLTAGE	220–240 V







CODE	Conica 350-GU10	Conica 250	Conica 350-E27
DRAWING			
POWER	7.5 W	7.5 W	20 W
DIMENSIONS	Ø350 mm, 1740 mm total drop	Ø250 mm, 1680 mm total drop	Ø350 mm

Product page and enquiries
labos.com.tr/products/surface/conica/






STELO

Pendant

VERSIONS	POWER
5	7.5–20 W

ADJUSTMENT	Fixed
IP	IP20
VOLTAGE	220–240 V



CODE	Stelo 350	Stelo E 286	Stelo 150	Stelo 270	Stelo 43 400
DRAWING					
POWER	7.5 W	7.5 W	7.5 W	7.5 W	20 W
DIMENSIONS	Ø60 × 350 mm	Ø60 × 286 mm	Ø60 × 150 mm	Ø60 × 270 mm	Ø43 × 400 mm


Product page and enquiries
labos.com.tr/products/surface/stelo/

VELA

Pendant



VERSIONS	POWER	FLUX
3	7–20 W	788–2420 lm

CCT	2700 / 3000 K
CRI	90
IP	IP20 / IP44
DIMMING	TRIAC
VOLTAGE	220–240 V







CODE	Vela Susp	Vela 75 Susp / Vela 75A Susp	Vela 75 Susp E14 / Vela 75A Susp E14
DRAWING			
POWER	19 W	7 W	20 W
FLUX	2420 lm / 2280 lm	788 lm	–
CURRENT	500 mA	200 mA	–
DIMENSIONS	1200 × Ø40 mm	Ø75 × 241 mm	Ø75 × 241 mm
ADJUSTMENT	Fixed	Fixed	–

Product page and enquiries
labos.com.tr/products/surface/vela/

CODE INDEX

Every order code in this collection and the page it is on.

PART 1 OF 5

32.04515	083	52.04512	008	57.07511	015	93.06213	138
32.04526	085	52.04538	007	57.09013	012	93.06218	137
32.04530	082	52.04539	007	57.09015	012	93.07311	138
32.04538	086	52.05018	011	57.09017	012	93.08413	137
32.05522	085	52.05019	011	57.09018	012	93.09011	138
32.05529	087	52.05549	015	57.09518	014	93.10111	137
32.05532	086	52.05552	014	60.05012	013	Auris Air IP	164
32.06219	083	52.05557	007	60.05013	013	Auris Air T	096
32.06519	085	52.05559	007	60.05015	013	Auris ED Adj R	160
32.06528	082	52.06020	011	60.05016	013	Auris ED Adj R/SQ	160
32.06532	086	52.06021	011	60.06012	013	Auris ED Adj SQ	160
32.07313	083	52.06520	017	60.06013	013	Auris ED Adj SQ2	160
32.07326	082	52.07013	011	60.06015	013	Auris IP	048
32.07330	087	52.07015	011	60.06016	013	Auris K1 IP	164
32.08432	086	52.07540	015	60.07011	013	Auris K2 IP	164
32.09013	083	52.07542	014	60.07012	013	Auris Medi Air T	096
32.09017	085	52.08529	017	60.07013	013	Auris Mini Air	165
32.09020	087	52.09012	011	60.07015	013	Auris Mini Air LT	096
32.10112	084	52.09013	011	60.09013	013	Auris Mini Air T-9W / Auris DIM / Auris	096
32.11911	084	52.09538	014	60.09015	013		
33.10011	081	52.10513	017	60.09016	013	Auris Mini Air T-GU10	097
33.20011	081	56.04011	005	60.09017	013	Auris Mini ED	167
51.03015	008	56.05518	005	62.02513	110	Auris Mini ED IP	163
51.03027	016	56.06511	005	62.02516	111	Auris Mini K1	165
51.03823	009	56.08011	005	62.02812	109	Auris Mini K2	166
51.03825	009	57.05013	012	62.03517	110	Auris Mini K3	166
51.04011	008	57.05015	012	62.03520	111	Auris Mini K4	165
51.04511	008	57.05017	012	62.03811	109	Auris Mini K4 SQ	166
51.05013	016	57.05018	012	62.04512	108	Auris Mini R1	164
51.05017	011	57.05525	014	62.04531	110	Auris Mini R2	165
51.05018	011	57.05526	015	62.04540	111	Auris Mini R2 S60 G2 2	048
51.06011	011	57.06017	012	62.05518	110	Auris Mini R3	165
51.06012	011	57.06018	012	62.05526	111	Auris Mini R S60 G2	047
51.07012	011	57.06020	012	62.06217	108	Auris Mini S60 Hide	048
51.07013	011	57.06021	012	62.06511	111	Auris Mini SGR E1	166
51.09013	011	57.07016	012	62.07312	108	Auris Mini SGR E2	166
51.09015	011	57.07017	012	91.05513	139	Auris Mini SGR E3	167
51.11011	006	57.07019	012	91.07313	139	Auris Mini SQ2 S60 G2 2	047
51.13511	006	57.07020	012	91.09015	139	Auris Mini SQ S60 G2	047
51.16011	006	57.07510	014	93.04513	138	Auris R1 IP	164

CODE INDEX

Every order code in this collection and the page it is on.

PART 2 OF 5

Auris RD Adj/Fix	047
Auris S BI T	097
Auris S BI T1	097
Auris Slim	160
Auris Slim Air	162
Auris Slim Air T	097
Auris Slim ED	162
Auris Slim K4 SQ	162
Auris Slim KN1	163
Auris Slim KN2	163
Auris Slim KN3	163
Auris Slim KN4	163
Auris Slim N1	161
Auris Slim N2	161
Auris Slim N4	162
Auris Slim N6	162
Auris Slim R1	161
Auris Slim R2	161
Auris Slim R3	161
Auris Slim Susp	167
Azure	169
Azure Air	169
Azure H	172
Azure K1	170
Azure K2	171
Azure K3	171
Azure K4	171
Azure K4 SQ	171
Azure KN	169
Azure K T	100
Azure Plus	169
Azure Plus T	100
Azure R1	170
Azure R2	170
Azure R3	170
Azure T	100
Barra S60	052
Barra Susp S900 D3	174
Barra Susp S900 U2/D3	174
Barra Susp S1200 D4	174
Barra Susp S1200 U2/D4	174
Carmea Kit 1	050
Carmea Kit 2	050
Carmea SA	050
Carmea SAL	050
Carmea SF	050
Celis	149
Celis 2	149
Celis T	093
Colona R	193
Conica 250	203
Conica 350-E27	203
Conica 350-GU10	203
Cosvex S42L BI T IT	098
Cosvex S42Lx2 BI T IT	098
Cosvex S60 BI T IT	098
Cosvex S76 BI T IT	098
Cosvex S87 BI T IT	098
Deeplux 51	049
Deeplux 51 Kea	049
Deeplux 68	049
Deeplux 68 Kea	049
Deeplux RD76	049
Delterra Fixed	075
Delterra Fixed-13W	075
Delterra G2	074
Delterra Midi	074
Delterra Midi Fixed	074
Delterra Midi WW	076
Delterra Midi WW Hide	077
Delterra Mini	074
Delterra Mini 31 Fixed	075
Delterra Mini Fixed	075
Delterra Mini Fixed-9W	076
Delterra Mini WW	076
Delterra Mini WW Hide	077
Delterra OK G2	077
Delterra OK G2 Hide	078
Delterra WW	076
Delterra WW Hide	077
Dracon	072
Dracon 2	072
Dracon 2 Hide	072
Dracon Hide	072
Dracon Mini 40	071
Dracon Mini 40 2	071
Dracon Mini 40 2 Hide	071
Dracon Mini 40 Hide	071
Elan	104
Elan Erect	104
Focara Focus-T	105
Giznova ED Apollo	192
Giznova ED Fixed	192
Giznova ED G2	192
Giznova R	059
Gradia G R Soften	184
Gradia G SQ Soften	184
Gradia R	185
Gradia R Soften	185
Gradia R W	184
Gradia SQ	185
Gradia SQ Soften	185
Gradia SQ W	184
Hydros	156
Hydros 2	156
Hydros Extra 2	156
Hydros Extra Fixed G2	154
Hydros Extra Fixed G2 U&D	154
Hydros Extra Fixed S	152
Hydros Extra G2	156
Hydros Extra G2 Fixed U&D	151
Hydros Extra S	151
Hydros Extra S 2	151
Hydros Extra S Fixed	153
Hydros Extra S Fixed U&D	153
Hydros Extra S Susp Adj	158
Hydros Extra S Susp Adj U&D	158
Hydros Extra Susp Adj U&D	157
Hydros Fixed	154
Hydros Fixed G2	155
Hydros Fixed U&D G2	155
Hydros Flat Base-2	157
Hydros Flat Base-3	157
Hydros Flat Base-4	157
Hydros Flat Base-5	158
Hydros G2 Fixed U&D	152
Hydros S	155
Hydros S 2	151
Hydros S Fixed	154
Hydros S Fixed U&D	155
Hydros S Flat Base-2	152
Hydros S Flat Base-3	152
Hydros S Flat Base-4	153
Hydros S Flat Base-5	153
Hydros T G2	094
Inaron G2 R	051
Inaron G2 SQ	051
Lavis Wall Wash	079
Lumetrix 5 ED	180
Lumetrix 5 ED Wall Wash	180
Lumetrix Mini 1	056
Lumetrix Mini 3	056
Lumetrix Mini 5	056
Lumetrix Mini 5 ED	180
Lumetrix Mini 10	056
Lumetrix Mini 10 ED	180
Lumetrix Mini Adjust 5	057
Lumetrix Mini Adjust 10	058
Lumetrix Mini Hide 3	057
Lumetrix Mini Hide 5	057
Lumetrix Mini Hide 10	057
Lumetrix Wall Wash 5	058
Lumetrix Wall Wash 10	058
Lumina	195
Lumina 2	195
Lumina Air	195
Lumina Air 2	195
Lumina Air R	195
Lumina R	195

CODE INDEX

Every order code in this collection and the page it is on.

PART 3 OF 5

Lunet Extra RD 054
Lunet Extra RD Fixed 054
Luxora R L 068
Luxora R L Focus 068
Luxora R L Focus Hide 068
Luxora R L Hide 068
Luxora R M-12W DTW 065
Luxora R M-13W 065
Luxora R M-MR16 065
Luxora R M Focus 065
Luxora R M Focus Hide 065
Luxora R M Hide-12W DTW 066
Luxora R M Hide-13W 066
Luxora R M Hide-MR16 066
Luxora R S-9W 062
Luxora R S-9W DTW 062
Luxora R S-MR16 062
Luxora R S Focus 061
Luxora R S Focus Hide 062
Luxora R S Hide-9W 062
Luxora R S Hide-9W DTW 063
Luxora R S Hide-MR16 063
Luxora R XS-6W 061
Luxora R XS-6W DTW 061
Luxora R XS Hide-6W 061
Luxora R XS Hide-6W DTW 061
Luxora SQ L 069
Luxora SQ L Focus 069
Luxora SQ L Focus Hide 069
Luxora SQ L Hide 069
Luxora SQ M-12W DTW 067
Luxora SQ M-13W 066
Luxora SQ M-MR16 067
Luxora SQ M Focus 066
Luxora SQ M Focus Hide 067
Luxora SQ M Hide-12W DTW 067
Luxora SQ M Hide-13W 067
Luxora SQ M Hide-MR16 068
Luxora SQ S-9W 063
Luxora SQ S-9W DTW 063
Luxora SQ S-MR16 064
Luxora SQ S Focus 063
Luxora SQ S Focus Hide 064
Luxora SQ S Hide-9W 064
Luxora SQ S Hide-9W DTW 064
Luxora SQ S Hide-MR16 064
Magnor S87 BI T 099
Magnor S102 BI T 099
Modulon 2 + S75U X3 197
Modulon E2 + SL40 L200X2 198
Modulon R1a + SL60 L200 197
Modulon R Basic + S40 198
Modulon R Basic + S40 E 198
Modulon R Basic + S60 197
Modulon R Basic + S75U 198
Modulon R Basic + SL40 100 197
Modulon R Basic + SL40 L200 197
Modulon S40 199
Modulon S40 E 200
Modulon S60 200
Modulon S60 E 200
Modulon S75 200
Modulon S75U 199
Modulon SL40 199
Modulon SL60 199
Modulon SQ2 + S75U X3 198
Modulon T26-400 200
Modulon T40 E-262 201
Modulon T40-250 201
Modulon T60 E-266 201
Modulon T60-250 201
Modulon T75U 199
Modulon T128 202
Modulon T178 202
Modulon T2646 201
Modulon T4066 202
Modulon TN250 202
Modulon TN350 202
Peranova R 041
Peranova R Adjust 040
Peranova R Adjust-GU10 043
Peranova R Adjust-MR16 043
Peranova R Low Adjust 040
Peranova R Low Adjust-GU10 044
Peranova R Low Adjust-MR16 044
Peranova R Wall Wash 042
Peranova SQ 041
Peranova SQ Adjust 041
Peranova SQ Adjust-GU10 042
Peranova SQ Adjust-MR16 042
Peranova SQ H Kit 1 045
Peranova SQ H Kit 2 045
Peranova SQ Kit 1 044
Peranova SQ Kit 2 044
Peranova SQ Low Adjust 041
Peranova SQ Low Adjust-GU10 043
Peranova SQ Low Adjust-MR16 043
Peranova SQ Wall Wash 042
Peranova S R 039
Peranova S R Adjust 040
Peranova S R Adjust + S R Kit 1 039
Peranova S R Adjust×2 + S R Kit 2 039
Peranova S R Wall Wash 040
Peranova S R Wall Wash + S R Kit 1 039
Perla 10 B 188
Perla 10 Module 188
Perla A 188
Perla B 188
Perla C 188
Perla Module 188
Pictora 187
Pivora Flat Base-2 177
Pivora Flat Base-3 178
Pivora Flat Base-4 178
Pivora Flat Base-5 178
Pivora G2 176
Pivora G2 T 102
Pivora Maxi 177
Pivora Mini G2 176
Pivora Plus BI T 102
Pivora Susp 177
Pivora Susp U&D 177
Pivora Tilt 176
Pivora Tilt Mini 176
Pivora Tilt Mini T 102
Pivora Tilt T 102
Profond Plus R 179
Profond Plus RD 053
Profond Plus RD Fixed 053
Profond Plus SQ 179
Profond R 179
Profond SQ 179
Quadris ED 194
Rondo Air 191
Rondo ED IP 190
Rondo K1 191
Rondo K4 191
Rondo R1 190
Rondo SGR E1 190
Rondo SGR E2 190
Rondo SGR E3 190
Rondo Susp 191
Rondo T 106
Sferra 173
Sferra 75S 173
Sferra 75SL BI T 101
Sferra T 101
Stelo 43 400 204
Stelo 150 204
Stelo 270 204
Stelo 350 204
Stelo E 286 204
Stylon 181
Stylon R1 80 181

CODE INDEX

Every order code in this collection and the page it is on.

PART 4 OF 5

Stylon R2 181
Stylon Slim ED 182
Stylon Slim ED 2 182
Stylon T 103
Trackon A100 131
Trackon A128 130
Trackon A128 Air 130
Trackon A178 131
Trackon A178 Air 131
Trackon Ambient-6W 132
Trackon Ambient-13W 132
Trackon Ambient-25W 132
Trackon Ambient Move-16W 133
Trackon Ambient Move-24W 134
Trackon Ambient S G2-9W 134
Trackon Ambient S G2-18W 134
Trackon CM5 G2 128
Trackon CM5 S 134
Trackon CM10 G2 128
Trackon CM10 S 134
Trackon CMA 5 Air 129
Trackon CMA 5S 129
Trackon CMA 10 Air 130
Trackon CMA 10S 129
Trackon CMA Ambient 129
Trackon Micro 122
Trackon Micro Ambient 121
Trackon Micro Ambient S-10W 123
Trackon Micro Ambient S-20W 124
Trackon Micro CM6 123
Trackon Micro CM12 123
Trackon Micro R-A 125
Trackon Micro R-B 125
Trackon Micro R-C 125
Trackon Micro Rise LS 124
Trackon Micro Rise R 121
Trackon Micro Rise R-B 124
Trackon Micro Rise SQ 121
Trackon Micro Rise SQ-B 124
Trackon Micro S22 122
Trackon Micro S22x2 122
Trackon Micro S30 122
Trackon Micro S30x2 122
Trackon Micro S40 121
Trackon Micro S40L 123
Trackon Micro S40Lx2 123
Trackon Micro SQ-A 124
Trackon Micro SQ-B 125
Trackon Micro SQ-C 125
Trackon Micro T30 121
Trackon Rise R 135
Trackon Rise SQ 135
Trackon S26 126
Trackon S26x2 126
Trackon S40 126
Trackon S40L 126
Trackon S40LL 133
Trackon S40Lx2 127
Trackon S40x2 126
Trackon S60 127
Trackon S60L 127
Trackon S62 Focus 127
Trackon S75 Plus 127
Trackon S75U 128
Trackon S100 Plus 128
Trackon T26 132
Trackon T40 133
Trackon T40 E 133
Trackon T100 G2 132
Trackon T128 130
Trackon T128 Tilt 130
Trackon T178 131
Trackon T178 Tilt 131
Trackon T2646 133
Trackon Wall Wash23-11W 128
Trackon Wall Wash23-21W 129
U-C400-4 026
U-C680-COB3 031
U-C680-COB3-2 031
U-C680-COB3-4 031
U-C704-SMD4 140
U-C704-SMD5 140
U-C704-SMD6 140
U-C739-SMD6 033
U-C739-SMD8 033
U-C1068-COB1 091
U-D107-24PM 146
U-D107-24PM-X 146
U-D332-1 027
U-D332-2 027
U-D332-4 027
U-D332-6 027
U-D332-9 027
U-D333-4 026
U-D333-6 026
U-D333-9 026
U-D335-4 025
U-D335-9 025
U-D335S-4 028
U-D335S-9 028
U-D336-1 024
U-D336-2 024
U-D336-4 024
U-D336-6 024
U-D336-9 024
U-D351-9P 147
U-D351-9P-X 147
U-D351-9PM 147
U-D351-9PM-X 147
U-D355-24 117
U-D355-24PC 117
U-D485-COB3 029
U-D485-COB4 029
U-D485-SMD4 029
U-D680-COB3 030
U-D680-COB3-2 030
U-D680-COB3-4 030
U-D739-SMD6 034
U-D752-SMD4 034
U-D836-COB 023
U-D836-COB1 023
U-D836-COB2 023
U-D881-COB 021
U-D881-COB1 022
U-D921-COB2 019
U-D921-COB3 019
U-D921-COB4 019
U-D921-COB5 019
U-D1067-COB1 141
U-D1067-COB2 141
U-D1067-COB3 141
U-D1068-COB1 091
U-D1098-COB3 018
U-D1098-COB4 018
U-D1098-COB5 018
U-D1101-COB2R 036
U-D1102-COB2-2 036
U-D1103-COB2 036
U-D1104-COB3 020
U-D1104-COB4 020
U-D1104-COB5 020
U-E739-SMD6 035
U-E752-SMD4 035
U-M473-SMD4 112
U-M505-SMD12 115
U-M505-SMD12PC 116
U-M507-SMD12 115
U-M651-SMD12 113
U-M811-SMD250 114
U-M811-SMD500 114
U-M812-SMD250 114
U-M812-SMD500 114
U-N003-09 118
U-P972-SMD1100 142
U-P985-SMD670 145
U-P985-SMD670-2 145
U-P985-SMD885-3 145
U-P986-SMD650-2 144

CODE INDEX

Every order code in this collection and the page it is on.

PART 5 OF 5

U-P986-SMD850	144
U-P1070-SMD650	148
U-P1073-SMD700	143
U-R836-COB3	023
U-R881-COB	022
U-R881-COB1	022
U-R881-COB2	022
U-T232-COB3	088
U-T232-COB4	088
U-T232-COB5	088
U-T239-COB3	092
U-T239-COB4	092
U-T239-COB5	092
U-T419-COB3	089
U-T419-COB4	089
U-T419-COB5	089
U-T559-COB-D	090
U-T559-COB1-D	090
U-T559-COB2-D	090
U-T680-COB3	032
U-T680-COB3-2	032
U-T680-COB3-4	032
U-T1009-COB3-M	037
U-Z010-SMD28	119
U-Z011-SMD28	119
Vela 75 Susp / Vela 75A Susp	205
Vela 75 Susp E14 / Vela 75A Susp E14	205
Vela Susp	205
Vertis G2 600 mm	186
Vertis G2 1200 mm	186

LIGHTING THE FUTURE

LABOS.COM.TR

HEAD OFFICE

Harbiye Mahallesi Darülbedai Caddesi
ICC No: 3 Kat: B3, Şişli, İstanbul

BRANCH

Des Sanayi Sitesi 101 Sokak A-2 Blok No: 48
34776 Yukarı Dudullu, İstanbul

CONTACT

+90 212 373 99 76
info@labos.com.tr

labos